




# INCANDESCENT CANOPY LIGHT FIXTURES

## STANDARD SURFACE MOUNT CANOPY LIGHTING FIXTURE

### SPECIFICATIONS:

- FIXTURE BODY: Cast aluminum
- SOCKET: Porcelain body with copper shell
- WATTAGE: 100 Watt bulb (not furnished)
- GASKETS: Silicone
- GLOBE: Plastic coated, clear, thermal and shock resistant

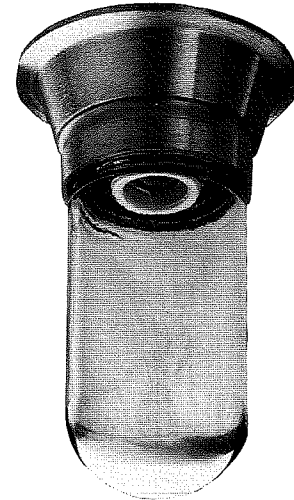


DESIGNED TO MEET ALL REQUIREMENTS FOR N.F.P.A CODE 96 AND N.E.C. 410



CANOPY LIGHTING FIXTURE	
Model No.	Description
L50-1004	Furnished with plastic coated thermal and shock resistant glass globe (NSF Listed)

GREASEPROOF, WATERPROOF AND HEATPROOF CONSTRUCTION  
DIE CAST ALUMINUM FIXTURES ARE BRUSH FINISH TO MATCH STAINLESS STEEL

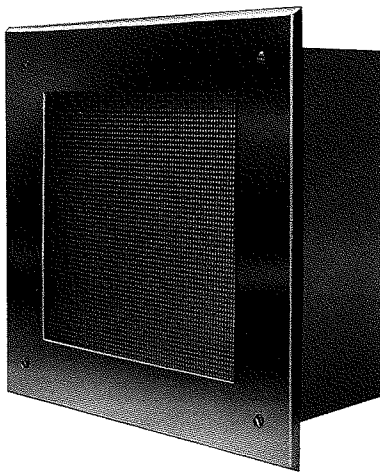

## OPTIONAL RECESSED INCANDESCENT CANOPY HOOD LIGHT FIXTURE

- STAINLESS STEEL FACEPLATE
- TEMPERED GLASS DIFFUSER




FIXTURE CONFORMS TO N.F.P.A. AND IS U.L. LISTED FOR CANOPY HOOD APPLICATION



MODEL NO. NSF-87-TG-2  
Available On A Special Order Basis

### SPECIFICATIONS:

- LAMP WATTAGE: 150 Watt bulb (not furnished)
- SOCKET: Side mounted porcelain medium base
- DIFFUSER: Crystal 73 tempered prismatic glass lens with prisms on inside of fixture
- LOCKUP: Four captive stainless steel screws
- FACEPLATE: One piece, stainless steel with smooth satin finish
- RETAINER: Twin spring and cable for faceplate or frame
- REFLECTOR: Die formed aluminum with satin finish
- BODY: Die formed steel recessing box with baked white enamel finish
- RIGID CONDUIT ENTRY: Special U.L. Listed hub

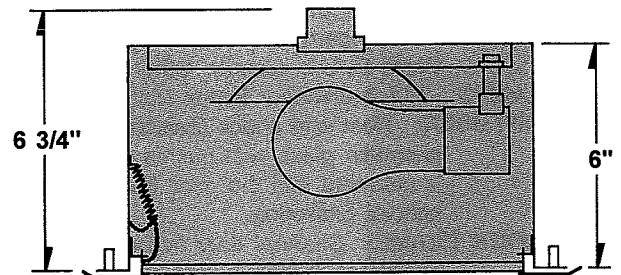

# OPTIONAL RECESSED FLUORESCENT CANOPY LIGHT FIXTURES



## OPTIONAL RECESSED FLUORESCENT CANOPY HOOD LIGHT FIXTURES

COMPLETE WITH STAINLESS STEEL FRAME AND TEMPERED GLASS DIFFUSER



ALL FIXTURES CONFORM TO N.F.P.A. 96 AND  
ARE U.L. LISTED FOR CANOPY HOOD APPLICATION



RECESSED FLUORESCENT CANOPY HOOD LIGHT FIXTURES			
Model No.	Lamps		Nominal Length
NSF-8220-TS-2	(2)F20T12TS	Available on a special order basis	24"
NSF-8230-RS-2	(2)F30T12RS	Available as a standard option	36"
NSF-8240-RS-2	(2)F40T12RS	Available as a standard option	48"

### SPECIFICATIONS:

**WIRING:** Rigid conduit is connected to the special U.L. Listed threaded hub and connections made to the fixture

**REFLECTOR:** Baked with white enamel finish. . . provides minimum 87% diffused reflection

**BALLAST:** Standard 120 volt, 60 cycle, high power factor, Class P, U.L. Listed. Other voltages available

**LAMPS:** T12 fluorescent lamps (not furnished)

**DIFFUSER:** Heat and shock resistant Crystal 73 tempered, prismatic glass with prisms on the inside of fixture, is mounted into the door frame and sealed with special gasketing

**DOOR FRAME:** Channel door frame, held with twin springs and cable is locked with captive stainless steel screws for easy servicing. All back surfaces are completely sealed with special gasketing

