



DUCT ACCESS DOORS

STANDARD SIZES

Quantity		Size	Dim. A Width	Dim. B Height	Frame Neck O.D.	Cams ADC	Cams ADH
ADC-D	ADH-D						
		6 x 6	6	6	4-7/8" x 4-7/8"	2	1
		8 x 8	8	8	6-7/8" x 6-7/8"	2	1
		10 x 10	10	10	8-7/8" x 8-7/8"	2	1
		12 x 12	12	12	10-7/8" x 10-7/8"	2	1
		14 x 14	14	14	12-7/8" x 12-7/8"	2	1
		16 x 16	16	16	14-7/8" x 14-7/8"	4	2
		18 x 18	18	18	16-7/8" x 16-7/8"	4	2
		20 x 20	20	20	18-7/8" x 18-7/8"	4	2
		24 x 24	24	24	22-7/8" x 22-7/8"	4	2
		24 x 36	24	36	22-7/8" x 34-7/8"	6	3

SPECIFICATIONS:


- DOOR PANEL:
24 gauge galvanized steel
- FRAME:
22 gauge galvanized steel
- INSULATION:
1" fiberglass
- PRE-FORMED TABS:
22 gauge galvanized steel

OPTIONAL CONSTRUCTION:

- .032" aluminum with plated steel cams and strikers
- 24 gauge stainless steel with stainless steel cams and strikers

Standard construction to 4.5" S.P.
High pressure construction available (see Model ADC-HP).

TYPICAL DOUBLE PANEL ACCESS DOOR

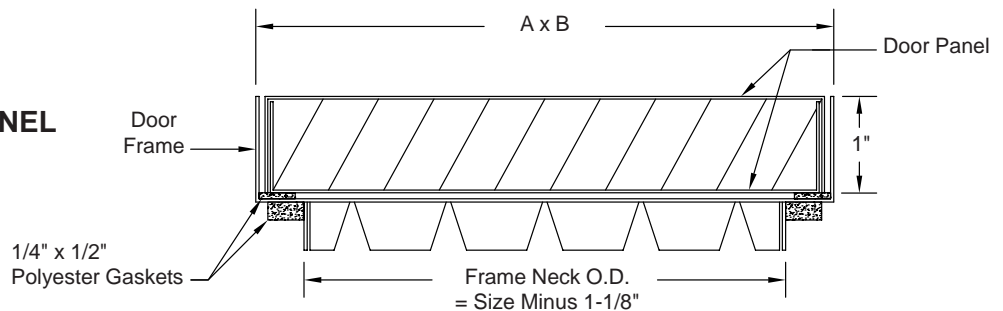

To maintain KEES' policy of continuous product improvement, we reserve the right to change prices, specifications, ratings or dimensions without notice or obligation.

Project		Location	
Engineer			
Architect		Dwg. No.	SD-ADC-H
Contractor		Date	03/04

KEES INCORPORATED
400 S. Industrial Dr. • P.O. Box L
Elkhart Lake, WI 53020
Phone: (920) 876-3391
Fax: (920) 876-3065
Website: www.kees.com