



# Architectural Wall/ Sill Bar Grilles

## CORE STYLES


### Core Styles

1300-25  
Bars 1/4" O.C.

1300-38  
Bars 3/8" O.C.

1300-50  
Bars 1/2" O.C.

### 0 DEGREE DEFLECTION



1/8" x 1/2" Bars. Support Bars 8" O.C. Other Centers Available.


### Core Styles

1315-25  
Bars 1/4" O.C.

1315-38  
Bars 3/8" O.C.

1315-50  
Bars 1/2" O.C.

### 15 DEGREE DEFLECTION



1/8" x 1/2" Bars. Other Centers Available. Support Bars 8" O.C. Available in aluminum construction only.

### Core Styles

1315F-25  
Bars 1/4" O.C.

1315F-38  
Bars 3/8" O.C.

1315F-50  
Bars 1/2" O.C.

### Core Styles

2500-50  
Bars 1/2" O.C.

2515-50  
Bars 1/2" O.C.


### 0 or 15 DEGREE DEFLECTION



1/4" x 1/2" Bars. Other Centers Available. Support Bars 12" O.C.


## FRAME STYLES

### Flanged Frame Styles FS or FM

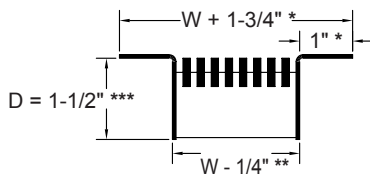


\* 1/2", 3/4" And 1-1/2" Flange Widths Also Available.  
\*\*\* 4" with Optional O.B.D.

### Face View FS Frame




### Section

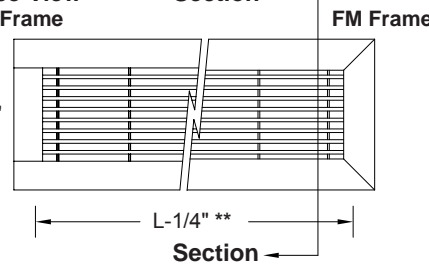

\*\* Core Length = L - 1/4"  
\*\* Overall core length varies for multiple section units based on tolerance of ±1/32" per section.


### Straight Frame Style S

- 1/8" or 1/4" x 1-1/2" Bar (Frame width matches core bar width)




## OPTIONS


### COUNTERSUNK SCREW HOLES / OPPOSED BLADE DAMPER




### FASTENING LUGS / FASTENING LUGS WITH OPPOSED BLADE DAMPER



### DUCT BRACKETS / DUCT BRACKETS WITH OPPOSED BLADE DAMPER

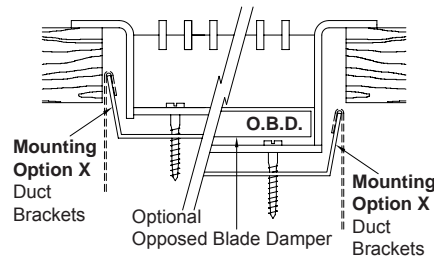

### LOOSE ANGLE FRAME WITH MOUNTING LUGS



Qty.	Listed Size		Core Depth D	# Sect.	Core Style	Core Bar Centers	Frame Style	Sup. Bar Spacing	Material	Mtg. Option	Finish	Damper	Tag
	L	W											

To maintain KEES' policy of continuous product improvement, we reserve the right to change prices, specifications, ratings or dimensions without notice or obligation.

<b>Project</b>				<b>Location</b>			
<b>Engineer</b>				<b>KEES INCORPORATED</b>			
<b>Architect</b>				<b>Dwg. No.</b>		<b>SD-WBG</b>	
<b>Contractor</b>				<b>Date</b>		<b>11/09</b>	



400 S. Industrial Dr. • P.O. Box L  
Elkhart Lake, WI 53020  
Phone: (920) 876-3391  
Fax: (920) 876-3065  
Website: www.kees.com



# Architectural Floor Bar Grilles


## CORE STYLES

Core Styles

1300-25  
Bars 1/4" O.C.

1300-38  
Bars 3/8" O.C.

0 DEGREE  
DEFLECTION




1/8" x 1/2" Bars. Other Centers Available.  
Support Bars 6" O.C.

Core Styles

1315F-25  
Bars 1/4" O.C.

1315F-38  
Bars 3/8" O.C.

15 DEGREE  
DEFLECTION




1/8" x 1/2" Bars. Other Centers Available.  
Support Bars 6" O.C. Available in aluminum construction only.

Core Style

2500-50  
Bars 1/2" O.C.


0 DEGREE  
DEFLECTION



1/4" x 1/2" Bars. Other Centers Available.  
Support Bars 6" O.C.


## FRAME STYLES

Flanged Frame Style FF

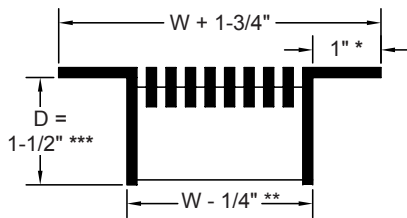

\* Other Flange Widths Also Available.  
\*\*\* 4" with Optional O.B.D.


FACE VIEW

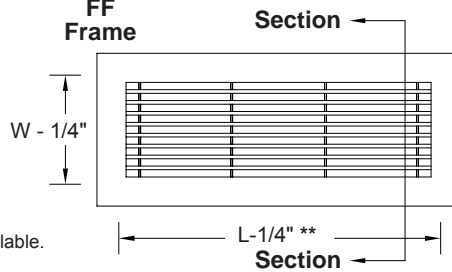

\*\* Overall core length varies for multiple section units based on tolerance of  $\pm 1/32"$  per section.

Straight Frame

Style S - 1/8" or 1/4" x 1-1/2" Bar  
(Frame width matches core bar width)




## OPTIONS

COUNTERSUNK SCREW HOLES /  
OPPOSED BLADE DAMPER

Mounting Option A

Countersunk Screw Holes

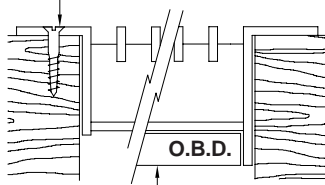


Optional Opposed  
Blade Damper

OPPOSED BLADE DAMPER  
WITH FASTENING LUGS

Mounting Option G

Fastening Lugs

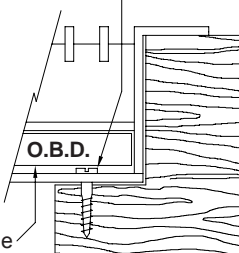


Optional  
Opposed Blade  
Damper

FASTENING LUGS / LOOSE ANGLE FRAME  
WITH MOUNTING LUGS

Mounting Option G

Fastening Lugs

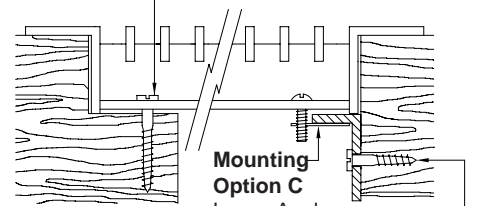

Mounting  
Option C  
Loose Angle  
With Cam Nuts

Fasteners  
By Others

Qty.	Listed Size		Core Depth D	# Sect.	Core Style	Core Bar Centers	Frame Style	Sup. Bar Spacing	Material	Mtg. Option	Finish	Damper	Tag
	L	W											

To maintain KEES' policy of continuous product improvement, we reserve the right to change prices, specifications, ratings or dimensions without notice or obligation.

<b>Project</b>		<b>Location</b>	
<b>Engineer</b>		<b>SD-FBG</b>	
<b>Architect</b>	<b>Dwg. No.</b>	<b>Date</b>	
<b>Contractor</b>		<b>11/09</b>	




**KEES INCORPORATED**  
400 S. Industrial Dr. • P.O. Box L  
Elkhart Lake, WI 53020  
Phone: (920) 876-3391  
Fax: (920) 876-3065  
Website: www.kees.com




# Architectural Gym Bar Grilles

## CORE STYLES

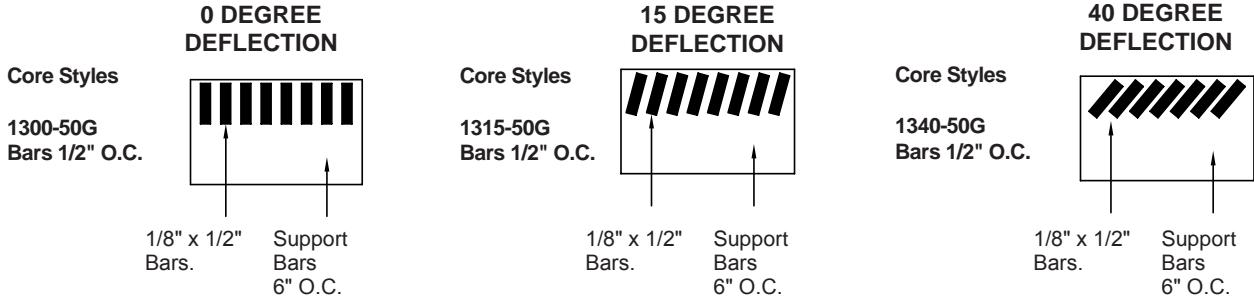


## FRAME STYLES

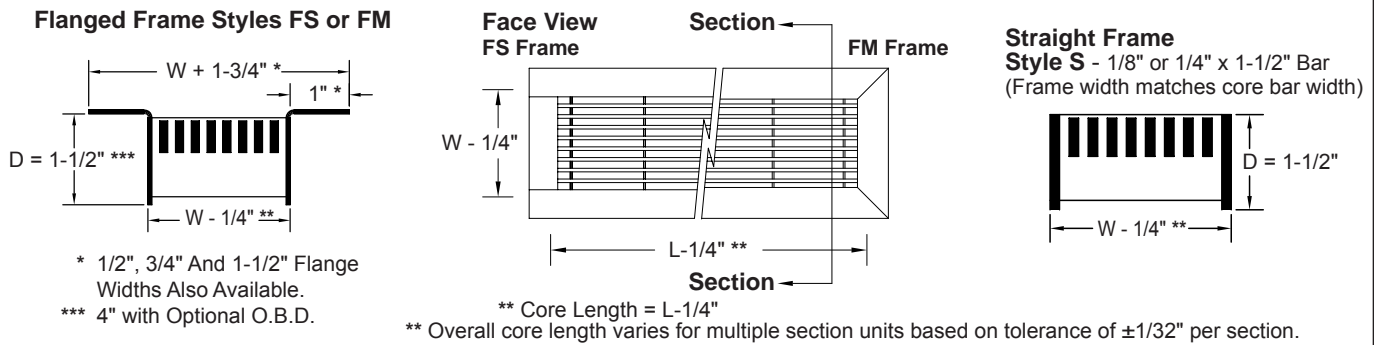


## OPTIONS


COUNTERSUNK SCREW HOLES / OPPOSED BLADE DAMPER

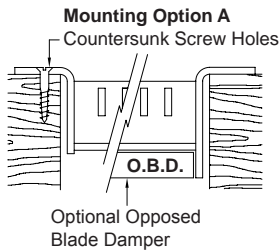


FASTENING LUGS / FASTENING LUGS WITH OPPOSED BLADE DAMPER

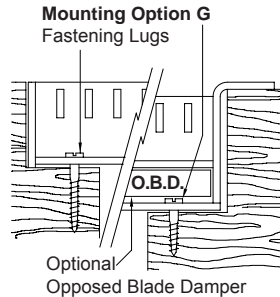

DUCT BRACKETS / DUCT BRACKETS WITH OPPOSED BLADE DAMPER

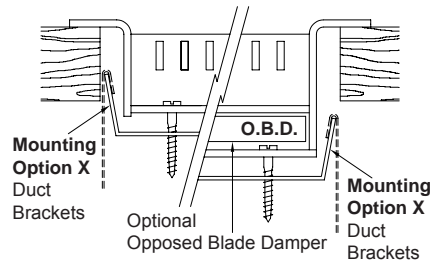

LOOSE ANGLE FRAME WITH MOUNTING LUGS



Qty.	Listed Size		Core Depth D	# Sect.	Core Style	Core Bar Centers	Frame Style	Sup. Bar Spacing	Material	Mtg. Option	Finish	Damper	Tag
	L	W											

To maintain KEES' policy of continuous product improvement, we reserve the right to change prices, specifications, ratings or dimensions without notice or obligation.

<b>Project</b>				<b>Location</b>			
<b>Engineer</b>				<b>KEES INCORPORATED</b>			
<b>Architect</b>				<b>Dwg. No.</b>		<b>SD-GBG</b>	
<b>Contractor</b>				<b>Date</b>		<b>11/09</b>	



400 S. Industrial Dr. • P.O. Box L  
 Elkhart Lake, WI 53020  
 Phone: (920) 876-3391  
 Fax: (920) 876-3065  
 Website: www.kees.com