

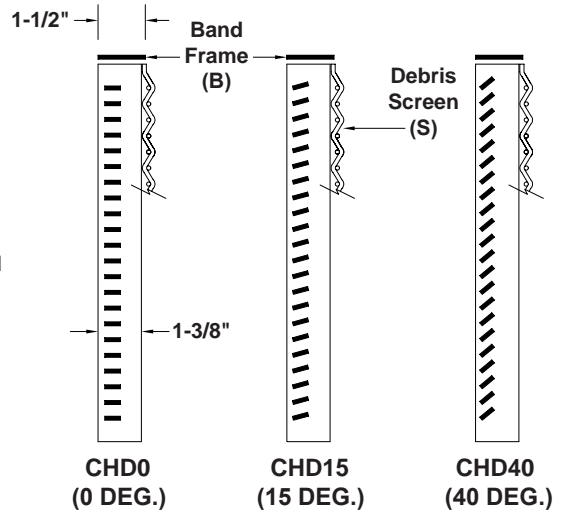


# CHD - GRILLE CORES

## OPTIONS

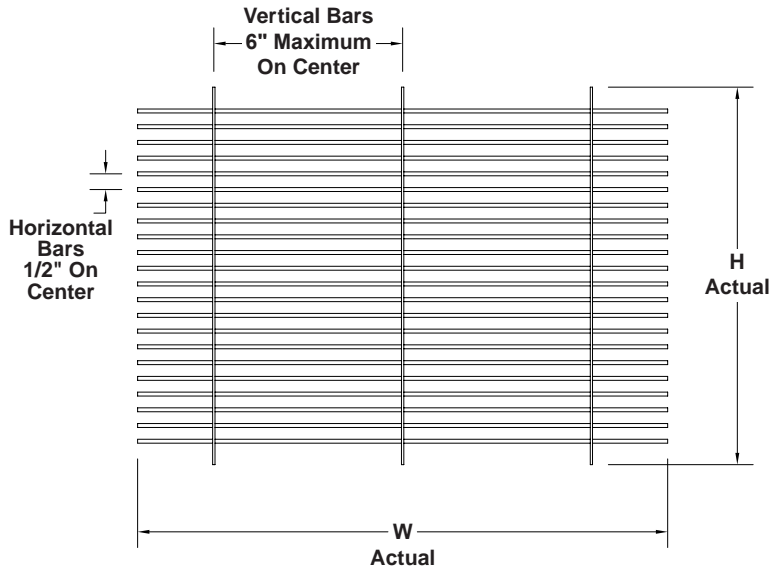

\* Not available on 40 degree core.

### CONSTRUCTION:

- 1/8" x 1/2" horizontal blades on 1/2 inch centers penetrating 14 gauge vertical support bars on 6 inch centers.
- Options: Blades at 0° (Designation CHD0), 15° (Designation CHD15) or 40° (Designation CHD40) deflection. Support bars on other centers.

### STANDARD FINISHES:

- Steel - Two part polyurethane white.
- Aluminum - Mill finish.
- Stainless Steel - 304 or 316 mill finish.

### OPTIONS (Suffix):


- B-Band frame around perimeter.
- G-Fastening lugs ( 0° and 15° only).
- S-Debris screen.
- Aluminum construction (.10")
- Stainless steel construction (12 ga.)
- Concealed mounting, Option G

### OPTIONAL FINISHES:

- Two-part polyurethane white finish (stainless steel).
- Other paint finishes.
- Clear or bronze anodized. (aluminum only).
- Satin polish (stainless steel only).
- Mill finish (industrial grade) blades (stainless steel only).

Qty.	Actual O.D.		Deflection			Material	Other Options	Finish	Tag
	W	H	0°	15°	40°				

To maintain KEES' policy of continuous product improvement, we reserve the right to change prices, specifications, ratings or dimensions without notice or obligation.

<b>Project</b>		<b>Location</b>		 <b>KEES INC.</b> 400 S. Industrial Dr. Elkhart Lake, WI 53020 Phone: (920) 876-3391 Fax: (920) 876-3065 Website: www.kees.com
<b>Engineer</b>		<b>Dwg. No.</b>	<b>SD-CHD</b>	
<b>Architect</b>		<b>Date</b>	<b>02/10</b>	
<b>Contractor</b>				