
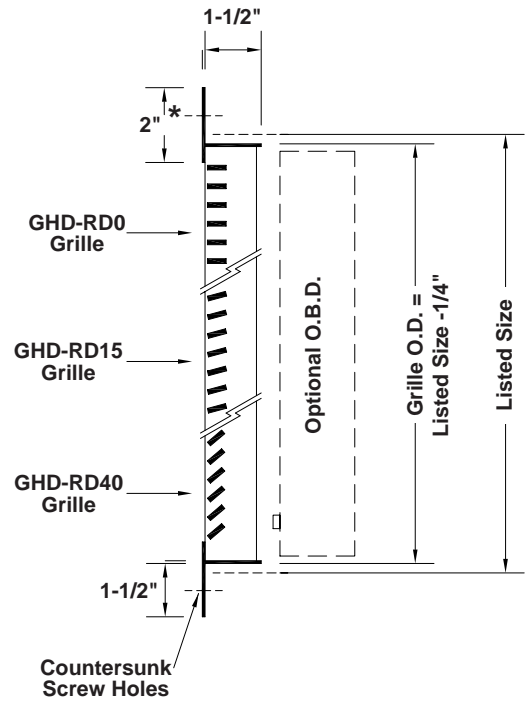


GHD-RD HEAVY DUTY BAR GRILLES

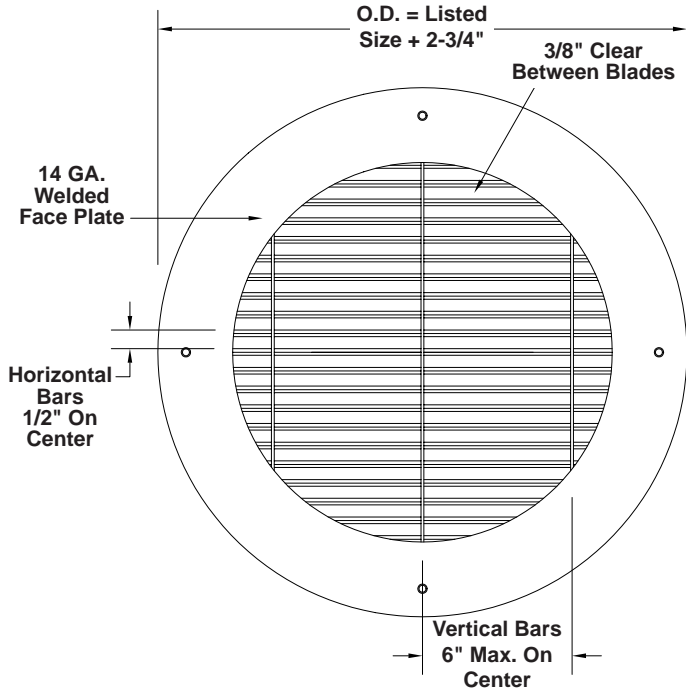

CONSTRUCTION:

- 14 gauge steel face plate.
Options: Face plate of any desired gauge.
- 1/8" x 1/2" horizontal blades on 1/2 inch centers penetrating 14 gauge vertical support bars on a maximum of 6 inch centers and welded to sleeve.
Options: Blades at 0° (Designation GHD-RD0), 15° (Designation GHD-RD15) or 40° (Designation GHD-RD40) deflection.
Support bars on other centers.
- Sleeve 14 gauge steel 1-1/2 inches long welded to face plate.
Options: Sleeve of any desired gauge.
- Countersunk screw holes on 10 inch centers approximately.

* 2-1/4" for 40° blade angle.

STANDARD FINISHES:


- STEEL - Two part polyurethane white
- ALUMINUM - (.10") Mill finish
- STAINLESS STEEL - (12 GA.) 304 or 316 satin finish.
(For architectural applications, see Architectural Round Bar Grille submittal.)

OPTIONS:

- Extended sleeve
- Opposed blade damper
- No screw holes
- Other paint finishes
- Mill finish (industrial grade) blades (stainless steel only)
- Clear or bronze anodized (aluminum only)
- Security screws

Qty.	Listed Size		Deflection			Material	Damper	Other Options	Finish	Tag
	Diameter		0°	15°	40°					

To maintain KEES' policy of continuous product improvement, we reserve the right to change prices, specifications, ratings or dimensions without notice or obligation.

Project				Location						
Engineer										 KEES INC. 400 S. Industrial Dr. • P.O. Box L Elkhart Lake, WI 53020 Phone: (920) 876-3391 Fax: (920) 876-3065 Website: www.kees.com
Architect				Dwg. No.	SD-GHD-RD					
Contractor				Date	02/10					