
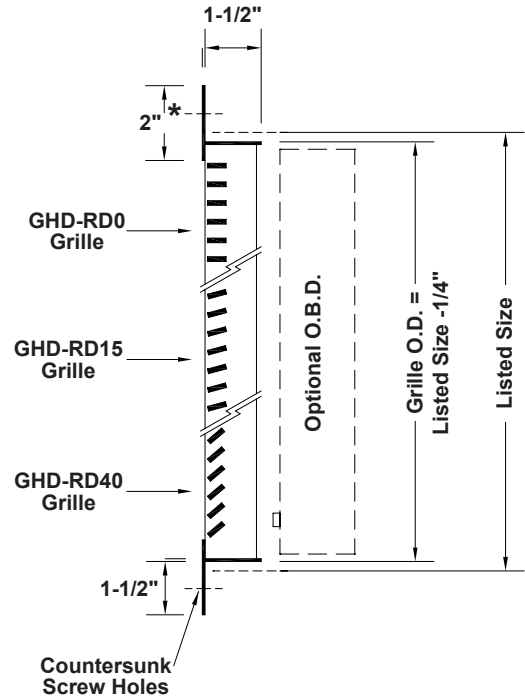


# GHD-RD HEAVY DUTY BAR GRILLES

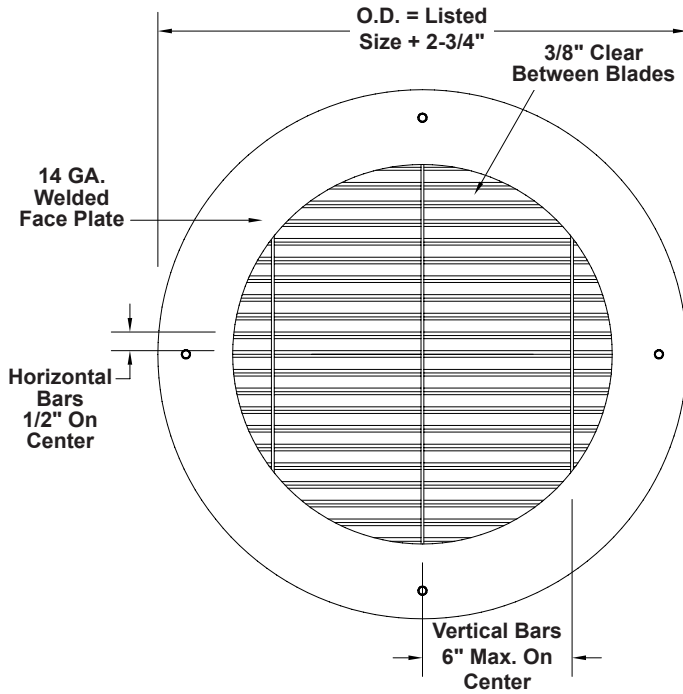

**CONSTRUCTION:**

- 14 gauge steel face plate.  
Options: Face plate of any desired gauge.
- 1/8" x 1/2" horizontal blades on 1/2 inch centers penetrating 14 gauge vertical support bars on a maximum of 6 inch centers and welded to sleeve.  
Options: Blades at 0° (Designation GHD-RD0), 15° (Designation GHD-RD15) or 40° (Designation GHD-RD40) deflection.  
Support bars on other centers.
- Sleeve 14 gauge steel 1-1/2 inches long welded to face plate.  
Options: Sleeve of any desired gauge.
- Countersunk screw holes on 10 inch centers approximately.

\* 2-1/4" for 40° blade angle.

**STANDARD FINISHES:**


- STEEL - Two part polyurethane white
- ALUMINUM - (.10") Mill finish
- STAINLESS STEEL - (12 GA.) 304 or 316 satin finish.  
(For architectural applications, see Architectural Round Bar Grille submittal.)

**OPTIONS:**

- Extended sleeve
- Opposed blade damper
- No screw holes
- Other paint finishes
- Mill finish (industrial grade) blades (stainless steel only)
- Clear or bronze anodized (aluminum only)
- Security screws

Qty.	Listed Size Diameter	Deflection			Material	Damper	Other Options	Finish	Tag
		0°	15°	40°					

To maintain KEES' policy of continuous product development, we reserve the right to change prices, specifications, ratings and dimensions without notice or obligation.

<b>Project</b>		<b>Location</b>	
<b>Engineer</b>	<b>Dwg. No.</b> SD-GHD-RD		 <b>KEES INCORPORATED</b> 400 S. Industrial Dr. Elkhart Lake, WI 53020 Phone: (920) 876-3391 Fax: (920) 876-3065 Website: www.kees.com
<b>Architect</b>	<b>Date</b>	02/10	
<b>Contractor</b>			