


MODEL KF High Moisture Hood

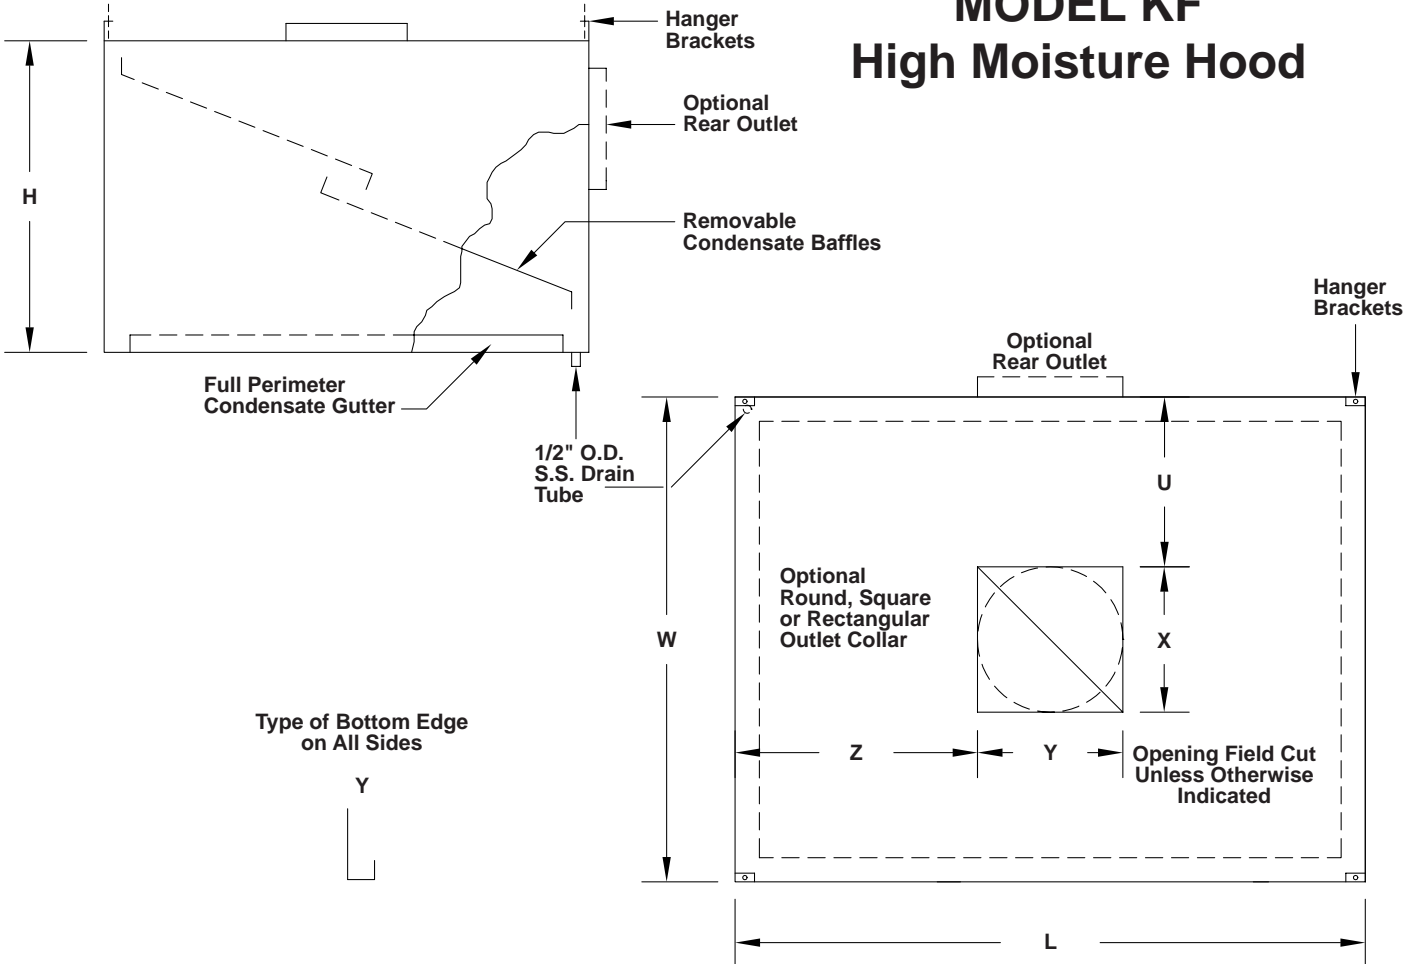

Quantity	① Material	② Material Gauge	Hood Dimensions		
			L	W	H

③ Factory Cut Opening				④ Drain Location	⑤ Finish	Other Options	Tag
U	X	Y	Z				

- ① Stainless (standard); Aluminum (optional)
- ② 18 ga. is standard; other gauges available.
- ③ Includes 1 inch high collar welded on.
- ④ Indicate where drain is required.
- ⑤ #3 polish standard.
- ⑥ Optional switch package with stainless steel raceway and junction box. (Fan switch with illuminated toggle).
 - Hood mounted Loose for wall mounting
 - Number of fan switches _____ Voltage _____ 115V _____ 24V



To maintain KEES' policy of continuous product improvement, we reserve the right to change prices, specifications, ratings or dimensions without notice or obligation.

Project			Location			
Engineer			KEES INCORPORATED 400 S. Industrial Dr. • P.O. Box L Elkhart Lake, WI 53020 Phone: (920) 876-3391 Fax: (920) 876-3065 Website: www.kees.com			
Architect		Dwg. No.				SD-KF
Contractor		Date				10/09