



Architectural Round Bar Grilles

CORE STYLES

<p>1300-25 Bars 1/4" O.C.</p> <p>1300-38 Bars 3/8" O.C.</p> <p>1300-50 Bars 1/2" O.C.</p>	<p>0 DEGREE DEFLECTION</p>	<p>1315-25 Bars 1/4" O.C.</p> <p>1315-38 Bars 3/8" O.C.</p> <p>1315-50 Bars 1/2" O.C.</p>	<p>15 DEGREE DEFLECTION</p>	<p>1315F-25 Bars 1/4" O.C.</p> <p>1315F-38 Bars 3/8" O.C.</p> <p>1315F-50 Bars 1/2" O.C.</p>	<p>2500-50 Bars 1/2" O.C.</p> <p>2515-50 Bars 1/2" O.C.</p>	<p>0 DEGREE DEFLECTION</p> <p>15° Deflection</p>
	<p>1/8" x 1/2" Bars. Support Bars Available. Other Centers 8" O.C.</p>		<p>1/8" x 1/2" Bars. Other Centers Available. Support Bars 8" O.C. Available in aluminum construction only.</p>			<p>1/4" x 1/2" Bars. Support Bars 12" O.C. Available. Other Centers Available.</p>

FRAME STYLES

Flanged Frame Styles FF

* 1/2", 3/4" And 1-1/2" Flange Widths Also Available.
*** 4" with Optional O.B.D.


Face View FF Frame

Diameter - 1/4"


Straight Frame Style S - 1/8" or 1/4" x 1-1/2" Bar
(Frame width matches core bar width)

OPTIONS

COUNTERSUNK SCREW HOLES / OPPOSED BLADE DAMPER



FASTENING LUGS / FASTENING LUGS WITH OPPOSED BLADE DAMPER

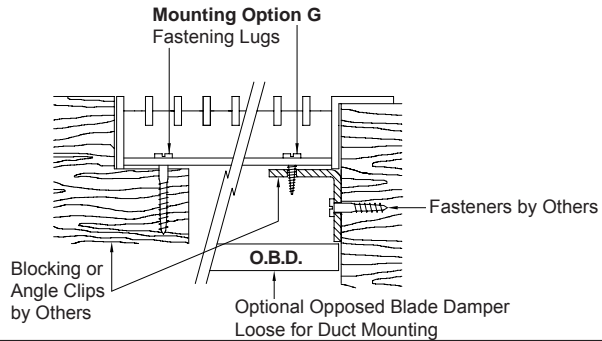

Qty.	Listed Size Diameter	Core Depth D	Core Style	Core Bar Centers	Frame Style	Sup. Bar Spacing	Material	Mtg. Option	Finish	Damper	Tag

To maintain KEES' policy of continuous product improvement, we reserve the right to change prices, specifications, ratings or dimensions without notice or obligation.

Project				Location				<p>KEES INCORPORATED 400 S. Industrial Dr. • P.O. Box L Elkhart Lake, WI 53020 Phone: (920) 876-3391 Fax: (920) 876-3065 Website: www.kees.com</p>							
Engineer				Dwg. No.								SD-RBG			
Architect				Date								07/10			
Contractor															