


# AIR DISTRIBUTION SUBMITTAL – MODEL RK

## SLOT DIFFUSERS FOR ROUND DUCTS – 1 THRU 4 SLOT MODELS

• Galvannealed steel construction.

- (A) Pre-punched frame holes for #6 hex head self-tapping screws (by others).
- (B) Factory fastened curved frame using #42 rivets.

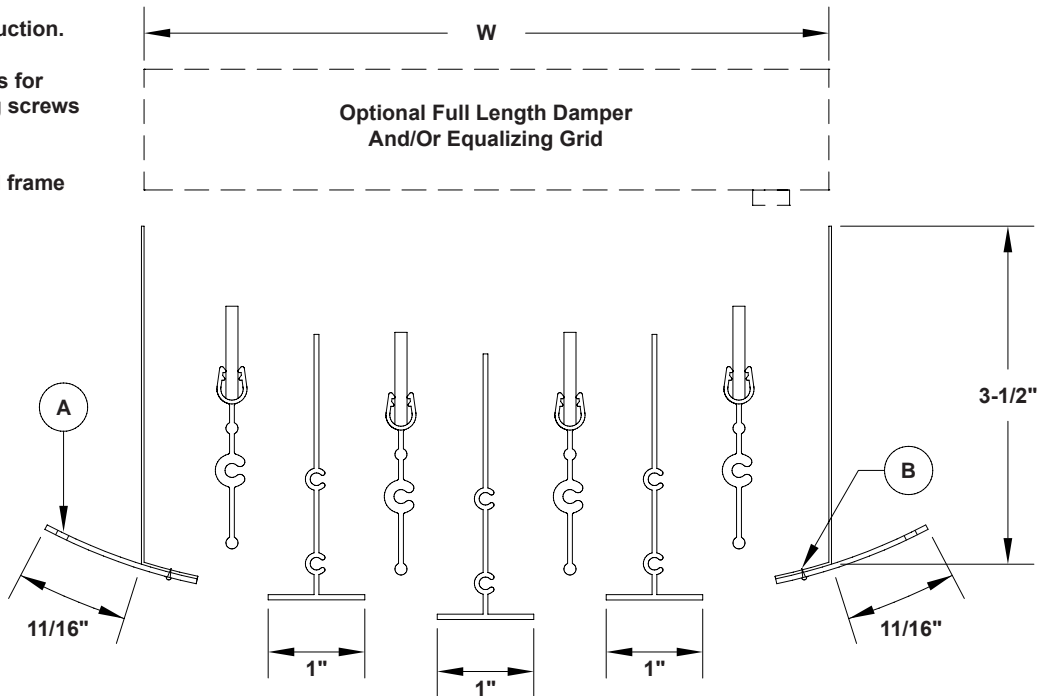

To fit all duct diameters from 12" to 60".

Model Nos.	Slot Width	W
RK-75-1	3/4"	2-1/4"
RK-100-1	1"	2-1/2"
RK-150-1	1-1/2"	3"
RK-75-2	3/4"	3-5/8"
RK-100-2	1"	4-1/8"
RK-150-2	1-1/2"	5-1/8"
RK-75-3	3/4"	5-3/8"
RK-100-3	1"	6-1/8"
RK-150-3	1-1/2"	7-5/8"
RK-75-4	3/4"	7-1/8"
RK-100-4	1"	8-1/8"
RK-150-4	1-1/2"	10-1/8"

Shown above is a typical 4 slot unit. Also available in 1, 2 and 3 slot configurations in slot widths of 3/4, 1 and 1-1/2 inches.

Lengths can vary to 36" in one section. Sections can be joined for longer lengths. Actual neck length equals listed length (L) minus 1/4". Length of face including flanges equals listed length plus 1-1/2".

Available with full length opposed blade dampers and/or equalizing grids for all models.

Matching returns available in all models and sizes - no pattern blades.

**Material:** Diffuser body 24 gauge steel. Face flange 18 gauge steel.  
Black air pattern deflector extruded aluminum with felt wiper seal.

**Finish:** Curved steel outside frame, extruded center "T" either all black or all white.

Quantity	Model	Length L	Duct Dia.	Finish	Damper	Tag

To maintain KEES' policy of continuous product development, we reserve the right to change prices, specifications, ratings and dimensions without notice or obligation.

Project	Location	
Engineer	Dwg. No.	Diff. RK
Architect	Date	09/12
Contractor		



**KEES INCORPORATED**  
400 S. Industrial Dr.  
Elkhart Lake, WI 53020  
Phone: (920) 876-3391  
Fax: (920) 876-3065  
Website: www.kees.com