
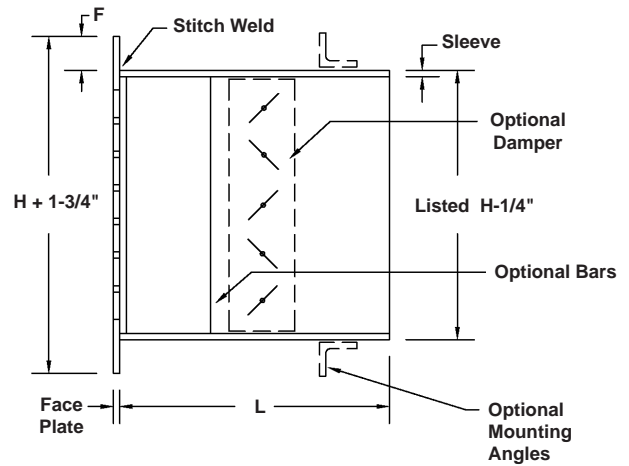


# SEG-11 SECURITY GRILLE — SUPPLY OR RETURN

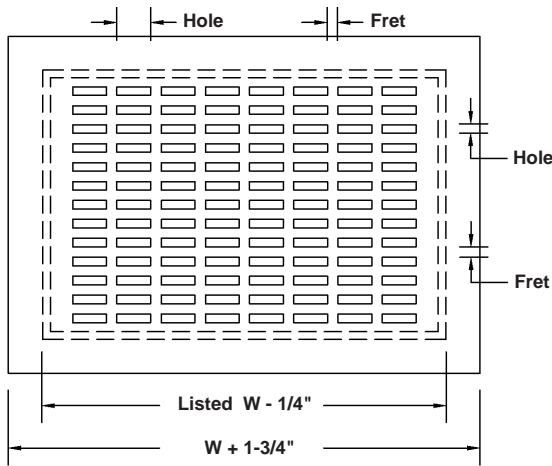

### STANDARD CONSTRUCTION

**Face:** 10 ga. steel stitch welded to sleeve. 1" face flange.  
**Hole Pattern:** 1" x 1/4" holes with 5/16" frets.  
**Sleeve:** 10 ga. steel with continuously welded or formed seams.  
**Finish:** Two part polyurethane inside and out. White.

### REQUIRED CONSTRUCTION:

- Face Material:**  10 ga. steel (Std.)  
 12 ga. steel  
 14 ga. steel  
 Other \_\_\_\_\_
- Hole Pattern:**  1" x 1/4" holes with 5/16" frets (Std.)  
 Other \_\_\_\_\_
- Flange "F":**  1" (Std.)  
 Other \_\_\_\_\_
- Sleeve Material:**  10 ga. steel (Std.)  
 12 ga. steel  
 14 ga. steel  
 Other \_\_\_\_\_
- Finish:**  White (Std.)  
 Other \_\_\_\_\_
- Other Material:**  **SEG-11A** all aluminum construction 1/8" thick.  
 **SEG-11SS** all stainless steel construction 12 ga. type 304.

### MOUNTING OPTIONS:

- 11A.** Two loose pieces of 1" x 1" x 1/8" mill finish steel angle loose for field welding. Length equal to longest side of grille. Other angle size \_\_\_\_\_
  - 11B.** Rear angle frame of 1" x 1" x 1/8" mill finish steel completely assembled for field welding. Other angle size \_\_\_\_\_
  - 12A.** Rear angle frame for bolting to sleeve. 1" x 1" x 1/8" steel with bolt holes 8" o.c. for 1/4" dia. bolts. No holes in sleeve. No bolts, nuts or washers. Other angle size \_\_\_\_\_
  - 12B.** Same as **12A** with the addition of bolt holes in sleeve. (Advise wall or ceiling thickness). Other angle size \_\_\_\_\_
  - 23.** Masonry anchors: 1/2" x 3" Anchors 16" o.c., one per side minimum, welded to sleeve exterior. Other size or spacing \_\_\_\_\_
  - 24.** Countersunk screw holes in face 10" o.c. with #10-24 x 2" long Torx security machine screws for 1-1/2" maximum ceiling thickness. 1" x 1" x 1/8" steel angle frame with matching holes and foldover nuts. Requires 1-1/2" flange.
  - 25.** Countersunk screw holes in face 10" o.c. with #10 x 1-1/2" long Torx security screws. Other screw length \_\_\_\_\_
- ACCESSORIES:**
- 16F.** Face operated opposed blade damper tack welded into sleeve. Dampers are adjusted using flat bladed screwdriver.
  - 16R.** Rear operated opposed blade damper tack welded into sleeve. Dampers are adjusted using flat bladed screwdriver.
  - 21.** 2-1/2" x 3/8" A-36 mild steel vertical bars 4" o.c., welded to sleeve.
  - Other:** \_\_\_\_\_

Qty.	Listed Size		Sleeve O.D.		Masonry Opening		Sleeve Length L	Wall / Ceiling Thickness	Accessories	Mounting Option	Tag
	W	H	W	H	W	H					

To maintain KEES' policy of continuous product improvement, we reserve the right to change prices, specifications, ratings or dimensions without notice or obligation.

<b>Project</b>		<b>Location</b>		
<b>Architect / Engineer</b>			 <b>KEES INCORPORATED</b> Elkhart Lake, WI 53020 Phone: (920) 876-3391 Fax: (920) 876-3065 Website: www.kees.com	
<b>Contractor</b>		<b>Dwg. No.</b>		SEG-11w 07/25/08
<b>Representative</b>		<b>Date</b>		