


# SEG-9TG SECURITY TRANSFER GRILLE - REMOVABLE FACE

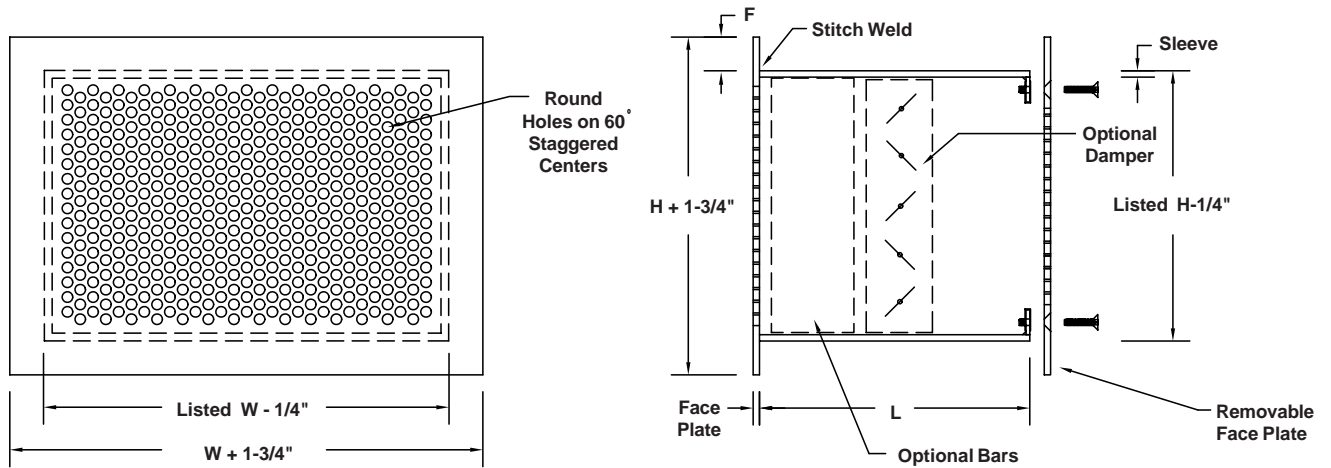

## STANDARD CONSTRUCTION

**Face:** 3/16" thick steel stitch welded to sleeve. 1" face flange.  
**Hole Pattern:** 5/16" diameter holes on 7/16" staggered centers.  
**Sleeve:** 3/16" steel with continuously welded or formed seams.  
**Finish:** Two part polyurethane inside and out. White.

## REQUIRED CONSTRUCTION:

- Face Material:**  3/16" steel (Std.)  
 10 ga. steel  
 12 ga. steel  
 Other \_\_\_\_\_
- Hole Pattern:**  5/16" dia. holes on 7/16" centers (Std.)  
 1/4" dia. holes on 3/8" centers  
 Other \_\_\_\_\_
- Flange "F":**  1" (Std.)  
 Other \_\_\_\_\_
- Sleeve Material:**  3/16" steel (Std.)  
 10 ga. steel  
 12 ga. steel  
 14 ga. steel  
 Other \_\_\_\_\_
- Finish:**  White (Std.)  
 Other \_\_\_\_\_
- Other Material:**  **SEG-9TGA** all aluminum construction  
 3/16" or 1/8" thick.
- SEG-9TGSS** all stainless steel construction  
 10 ga. type 304.

## MOUNTING OPTIONS:


- 26.** Countersunk screw holes in removable face 10" o.c. with #10-24 x 1" long Torx security machine screws. Screws thread into foldover nuts 10 ga. steel internal flange stitch welded to sleeve.

## ACCESSORIES:


- 16F.** Opposed blade damper tack welded into sleeve. operable through fixed face..
- 16R.** Opposed blade damper tack welded into sleeve, operable through removable face.
- 21.** 2-1/2" x 3/8" hot rolled steel vertical security bars 4" o.c., welded to sleeve.
- Other:** \_\_\_\_\_

Qty.	Listed Size		Sleeve O.D.		Masonry Opening		Sleeve Length L	Wall Thickness	Mounting	Accessories	Tag
	W	H	W	H	W	H					

To maintain KEES' policy of continuous product improvement, we reserve the right to change prices, specifications, ratings or dimensions without notice or obligation.

<b>Project</b>				<b>Location</b>						
<b>Architect / Engineer</b>				 <b>KEES INCORPORATED</b> 400 S. Industrial Dr. • P.O. Box L Elkhart Lake, WI 53020 Phone: (920) 876-3391 Fax: (920) 876-3065 Website: www.kees.com						
<b>Contractor</b>			<b>Dwg. No.</b>					SEG-9TGw 07/20/04		
<b>Representative</b>			<b>Date</b>							

# SEG-9TGFF SECURITY TRANSFER GRILLE - FIXED FACES

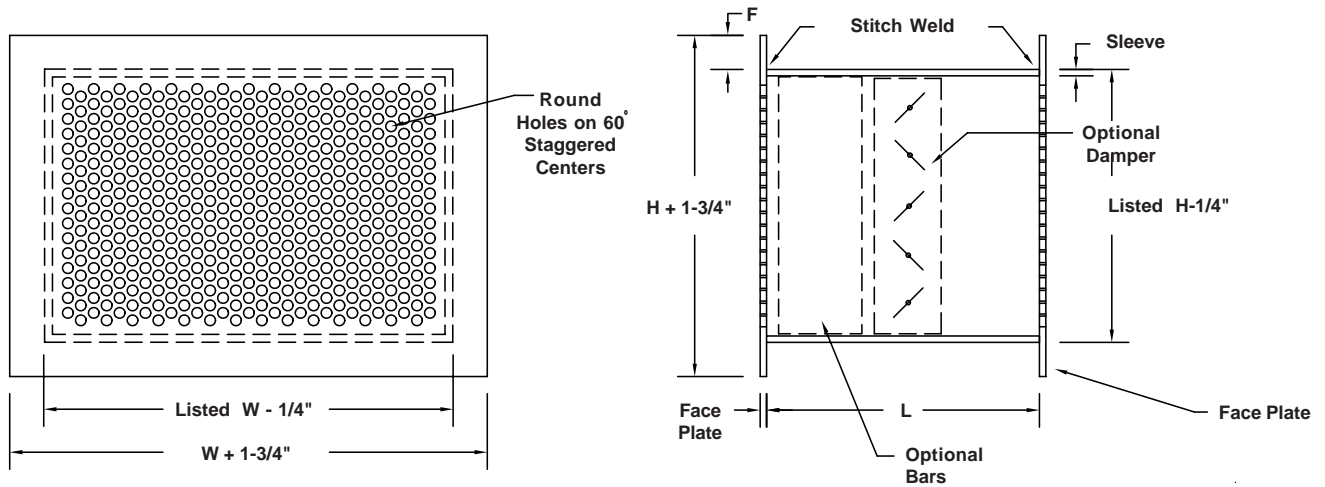

## STANDARD CONSTRUCTION

**Face:** 3/16" thick steel stitch welded to sleeve. 1" face flange.  
**Hole Pattern:** 5/16" diameter holes on 7/16" staggered centers.  
**Sleeve:** 3/16" steel with continuously welded or formed seams.  
**Finish:** Two part polyurethane inside and out. White.

## REQUIRED CONSTRUCTION:

- Face Material:**  3/16" steel (Std.)  
 10 ga. steel  
 12 ga. steel  
 Other \_\_\_\_\_
- Hole Pattern:**  5/16" dia. holes on 7/16" centers (Std.)  
 1/4" dia. holes on 3/8" centers  
 Other \_\_\_\_\_
- Flange "F":**  1" (Std.)  
 Other \_\_\_\_\_
- Sleeve Material:**  3/16" steel (Std.)  
 10 ga. steel  
 12 ga. steel  
 14 ga. steel  
 Other \_\_\_\_\_
- Finish:**  White (Std.)  
 Other \_\_\_\_\_
- Other Material:**  **SEG-9TGFFA** all aluminum construction  
 3/16" or 1/8" thick.
- SEG-9TGFFSS** all stainless steel construction  
 10 ga. type 304.

## MOUNTING OPTIONS:


- 26FF.** Both faces factory welded to sleeve. Grille must be set with block or poured in place.

## ACCESSORIES:

- 16F.** Opposed blade damper tack welded into sleeve. operable through face..
- 21.** 2-1/2" x 3/8" hot rolled steel vertical security bars 4" o.c., welded to sleeve.
- Other:** \_\_\_\_\_
- \_\_\_\_\_
- \_\_\_\_\_

Qty.	Listed Size		Sleeve O.D.		Masonry Opening		Sleeve Length L	Wall Thickness	Mounting	Accessories	Tag
	W	H	W	H	W	H					

To maintain KEES' policy of continuous product improvement, we reserve the right to change prices, specifications, ratings or dimensions without notice or obligation.

<b>Project</b>		<b>Location</b>		 <p><b>KEES INCORPORATED</b>          400 S. Industrial Dr. • P.O. Box L          Elkhart Lake, WI 53020          Phone: (920) 876-3391          Fax: (920) 876-3065          Website: www.kees.com</p>
<b>Architect / Engineer</b>		<b>Dwg. No.</b>	SEG-9TGRFFw 01/20/05	
<b>Contractor</b>		<b>Date</b>		
<b>Representative</b>				