

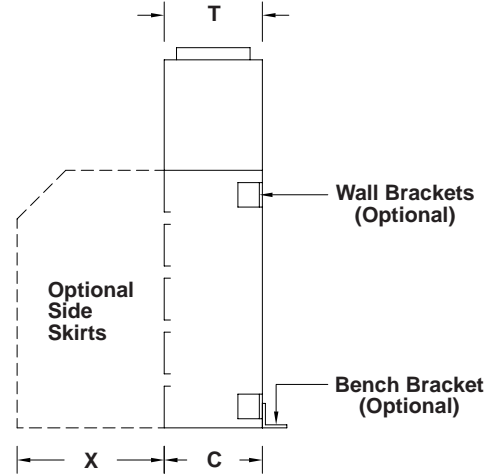


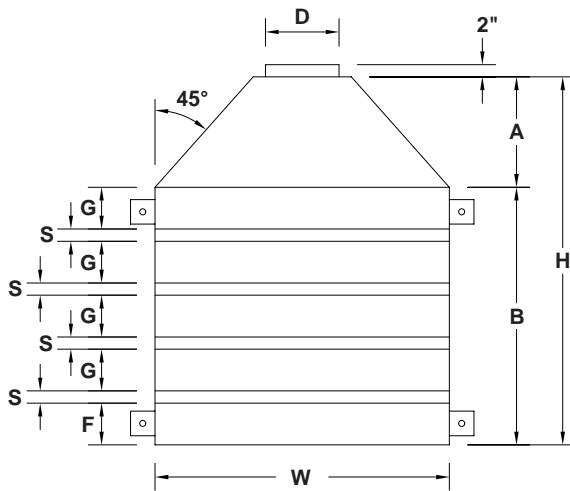

# SLOTTED BACK SHELF INDUSTRIAL HOODS

**TYPICAL USES:** Welding, tank venting, high toxicity venting.

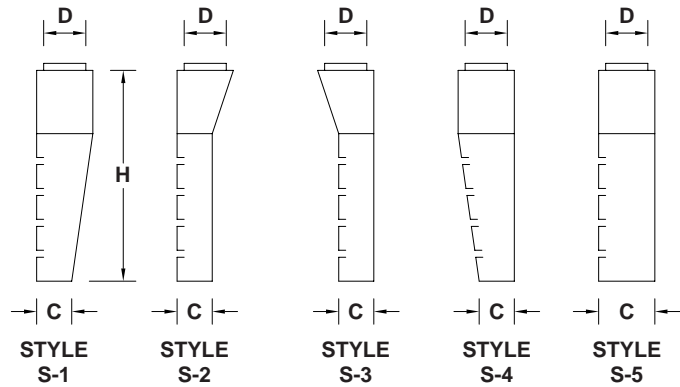

**CFM GUIDELINES:** 350 CFM per foot of hood width (W). Slots sized for 2,000 FPM.

**CONSTRUCTION:** All welded 18 GA. galvanized steel, 18 GA. 304 or 316 stainless steel with 2B finish or .063 aluminum. Heavier gauges available: 16, 14, 12 and 10.

**DIMENSIONS:** As required for job conditions. Available in single or multiple sections. Standard are four equally spaced 1/2 inch slots. All other number and widths of slots available.

Qty.	Style	Material	Gauge	No. of Sections	W	H	A	B	C	Nominal D	Actual O.D / I.D.

F	G	T	No. of Slots	S	No. of Side Skirts	X	Finish	Options	Tag

To maintain KEES' policy of continuous product development, we reserve the right to change prices, specifications, ratings and dimensions without notice or obligation.

<b>Project</b>		<b>Location</b>	
<b>Engineer</b>			
<b>Architect</b>		<b>Dwg. No.</b>	<b>SD-SMBS</b>
<b>Contractor</b>		<b>Date</b>	<b>09/10</b>



**KEES INCORPORATED**  
 400 S. Industrial Dr.  
 Elkhart Lake, WI 53020  
 Phone: (920) 876-3391  
 Fax: (920) 876-3065  
 Website: www.kees.com