Model
AD-2K-Two Panel

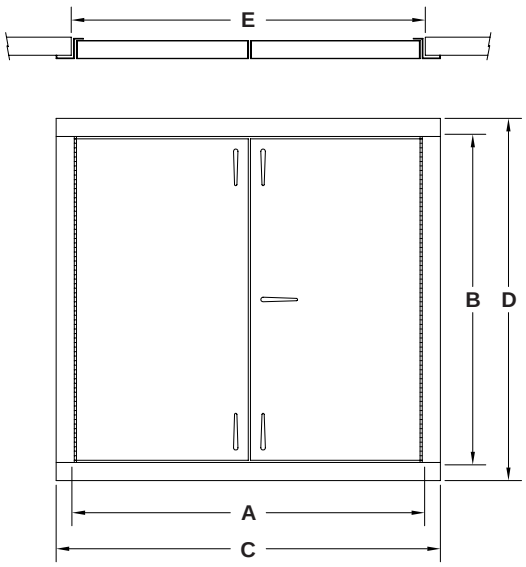

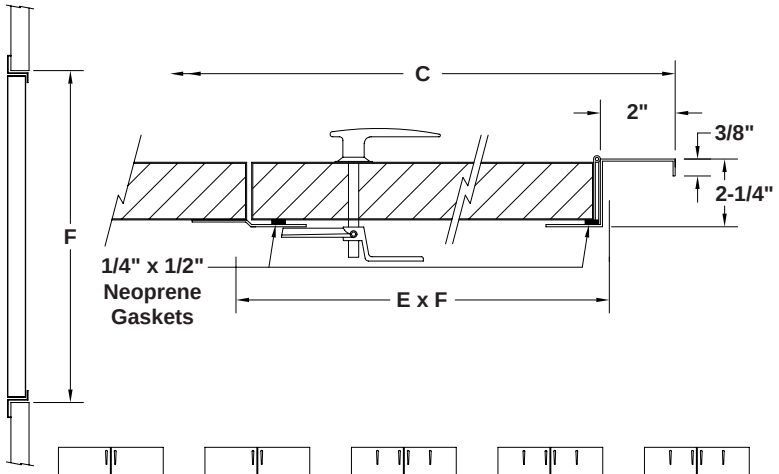

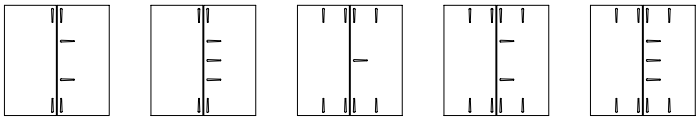

6 Handles | 7 Handles | 9 Handles | 10 Handles | 11 Handles

Qty.	Model	Size	Frame Neck O.D. Nominal Size A	B	Frame Outside Dimension C	D	Duct Opening Dimension E	F	No. of Latches
		48 x 36	48	36	52	40	52-1/4	36-1/4	5
		48 x 48	48	48	52	52	52-1/4	48-1/4	5
		48 x 54	48	54	52	58	52-1/4	54-1/4	6
		48 x 60	48	60	52	64	52-1/4	60-1/4	6
		48 x 72	48	72	52	76	52-1/4	72-1/4	6
		48 x 84	48	84	52	88	52-1/4	84-1/4	7
		48 x 96	48	96	52	100	52-1/4	96-1/4	7

Construction Details

Hinge always furnished on height "B" dimension.

FLANGED FRAME
14 ga. galvanized steel
12 ga. on doors 96" high

DOOR PANEL
20 ga. galvanized steel
18 ga. on doors wider than 18"

HANDLES
Ventlock #260 - shipped loose for field installation
Work from inside and outside

INSULATION
2 in. fiberglass

GASKET
Closed cell neoprene gasket

HINGE
Continuous steel - zinc-plated

All materials are mill finish.

Standard construction to 4.5" S.P.

To maintain KEES' policy of continuous product improvement, we reserve the right to change prices, specifications, ratings or dimensions without notice or obligation.

Project		**Location**	
Engineer			
Architect		**Dwg. No.**	**SD-AD2-K TWO PANEL**
Contractor		**Date**	**06/08**

KEES INCORPORATED
400 S. Industrial Dr. • P.O. Box L
Elkhart Lake, WI 53020
Phone: (920) 876-3391
Fax: (920) 876-3065
Website: www.kees.com