



Architectural Wall/ Sill Bar Grilles

CORE STYLES


Core Styles

1300-25
Bars 1/4" O.C.

1300-38
Bars 3/8" O.C.

1300-50
Bars 1/2" O.C.

0 DEGREE DEFLECTION



1/8" x 1/2" Bars. Support Bars 8" O.C. Other Centers Available.


Core Styles

1315-25
Bars 1/4" O.C.

1315-38
Bars 3/8" O.C.

1315-50
Bars 1/2" O.C.

15 DEGREE DEFLECTION



1/8" x 1/2" Bars. Other Centers Available. Support Bars 8" O.C. Available in aluminum construction only.

Core Styles

1315F-25
Bars 1/4" O.C.

1315F-38
Bars 3/8" O.C.

1315F-50
Bars 1/2" O.C.

Core Styles

2500-50
Bars 1/2" O.C.

2515-50
Bars 1/2" O.C.


0 or 15 DEGREE DEFLECTION



1/4" x 1/2" Bars. Other Centers Available. Support Bars 12" O.C.


FRAME STYLES

Flanged Frame Styles FS or FM

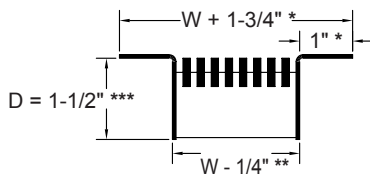


* 1/2", 3/4" And 1-1/2" Flange Widths Also Available.
*** 4" with Optional O.B.D.

Face View FS Frame




Section

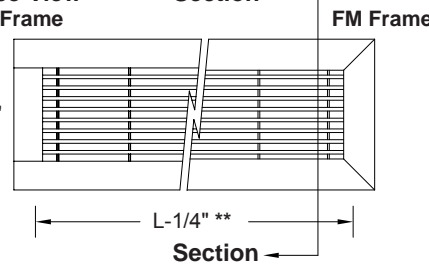

** Core Length = L - 1/4"
** Overall core length varies for multiple section units based on tolerance of ±1/32" per section.


Straight Frame Style S

- 1/8" or 1/4" x 1-1/2" Bar (Frame width matches core bar width)




OPTIONS


COUNTERSUNK SCREW HOLES / OPPOSED BLADE DAMPER




FASTENING LUGS / FASTENING LUGS WITH OPPOSED BLADE DAMPER



DUCT BRACKETS / DUCT BRACKETS WITH OPPOSED BLADE DAMPER

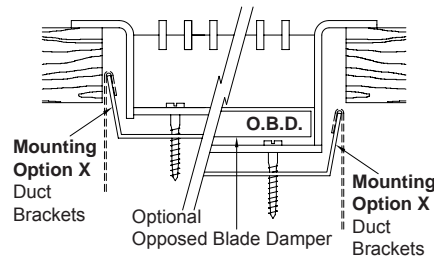

LOOSE ANGLE FRAME WITH MOUNTING LUGS



Qty.	Listed Size		Core Depth D	# Sect.	Core Style	Core Bar Centers	Frame Style	Sup. Bar Spacing	Material	Mtg. Option	Finish	Damper	Tag
	L	W											

To maintain KEES' policy of continuous product improvement, we reserve the right to change prices, specifications, ratings or dimensions without notice or obligation.

Project		Location		<p>KEES INCORPORATED 400 S. Industrial Dr. • P.O. Box L Elkhart Lake, WI 53020 Phone: (920) 876-3391 Fax: (920) 876-3065 Website: www.kees.com</p>
Engineer		Dwg. No.	SD-WBG	
Architect		Date	11/09	
Contractor				



Architectural Floor Bar Grilles


CORE STYLES

Core Styles

1300-25
Bars 1/4" O.C.

1300-38
Bars 3/8" O.C.

0 DEGREE
DEFLECTION




1/8" x 1/2" Bars. Support
Other Centers Bars
Available. 6" O.C.

Core Styles

1315F-25
Bars 1/4" O.C.

1315F-38
Bars 3/8" O.C.

15 DEGREE
DEFLECTION




1/8" x 1/2" Bars. Other Support Bars 6" O.C.
Centers Available. Available in aluminum
construction only.

Core Style

2500-50
Bars 1/2" O.C.


0 DEGREE
DEFLECTION



1/4" x 1/2" Bars. Support
Other Centers Bars
Available. 6" O.C.


FRAME STYLES

Flanged Frame Style FF

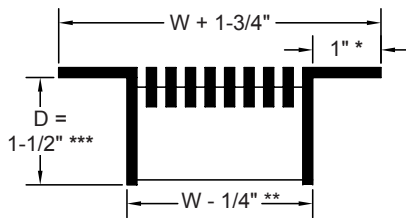


* Other Flange Widths Also Available.
*** 4" with Optional O.B.D.

FACE VIEW

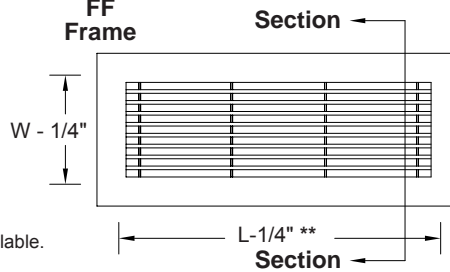

Straight Frame

Style S - 1/8" or 1/4" x 1-1/2" Bar
(Frame width matches core bar width)

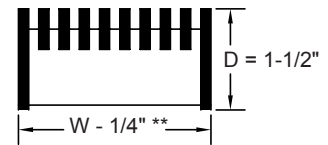


** Overall core length varies for multiple section units based on tolerance of $\pm 1/32"$ per section.

OPTIONS

COUNTERSUNK SCREW HOLES /
OPPOSED BLADE DAMPER

Mounting Option A

Countersunk Screw Holes

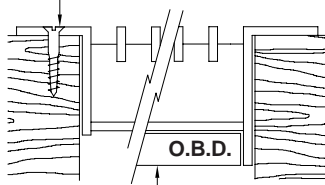


Optional Opposed
Blade Damper

OPPOSED BLADE DAMPER
WITH FASTENING LUGS

Mounting Option G

Fastening Lugs

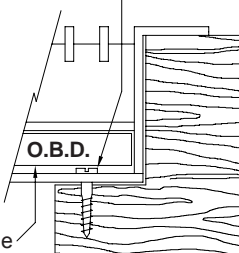


Optional
Opposed Blade
Damper

FASTENING LUGS / LOOSE ANGLE FRAME
WITH MOUNTING LUGS

Mounting Option G

Fastening Lugs

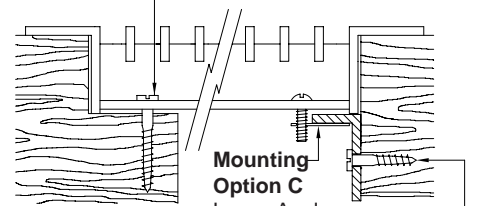

Mounting
Option C
Loose Angle
With Cam Nuts

Fasteners
By Others

Qty.	Listed Size		Core Depth D	# Sect.	Core Style	Core Bar Centers	Frame Style	Sup. Bar Spacing	Material	Mtg. Option	Finish	Damper	Tag
	L	W											

To maintain KEES' policy of continuous product improvement, we reserve the right to change prices, specifications, ratings or dimensions without notice or obligation.

Project		Location	
Engineer		SD-FBG	
Architect		Dwg. No.	11/09
Contractor		Date	11/09




KEES INCORPORATED
400 S. Industrial Dr. • P.O. Box L
Elkhart Lake, WI 53020
Phone: (920) 876-3391
Fax: (920) 876-3065
Website: www.kees.com




Architectural Gym Bar Grilles

CORE STYLES

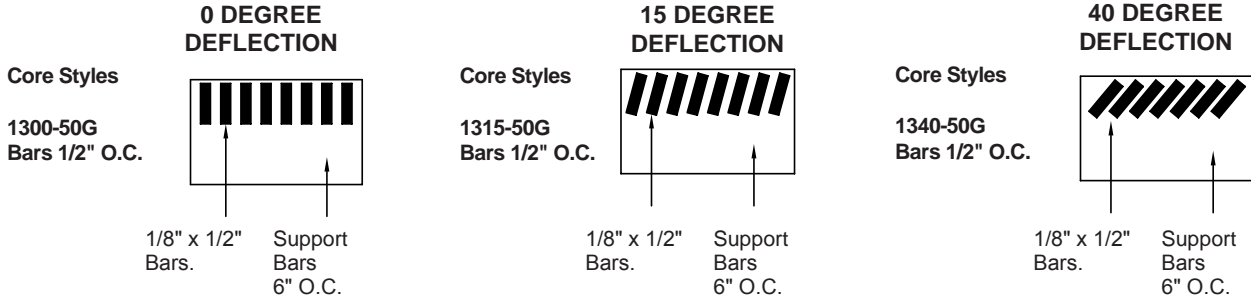


FRAME STYLES

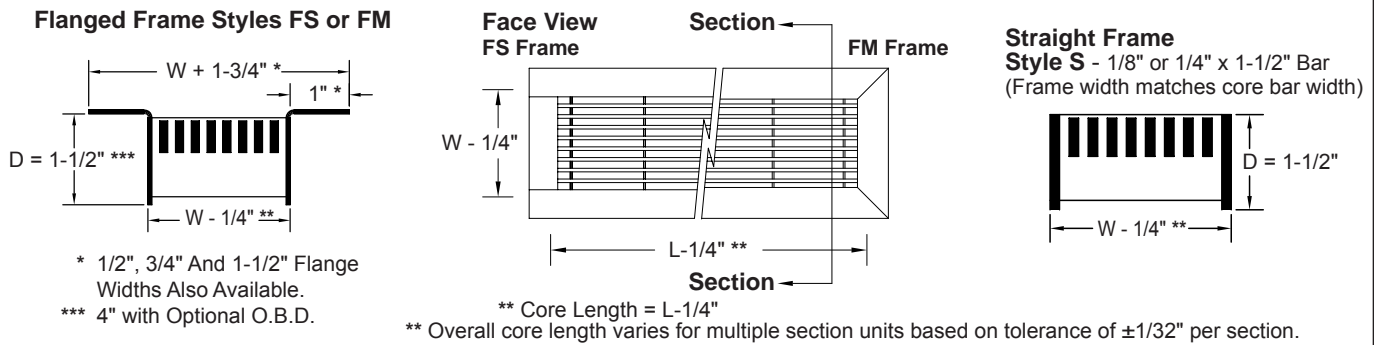


OPTIONS


COUNTERSUNK SCREW HOLES / OPPOSED BLADE DAMPER

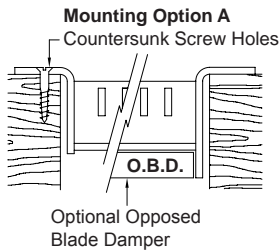


FASTENING LUGS / FASTENING LUGS WITH OPPOSED BLADE DAMPER

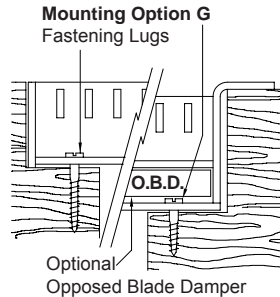

DUCT BRACKETS / DUCT BRACKETS WITH OPPOSED BLADE DAMPER

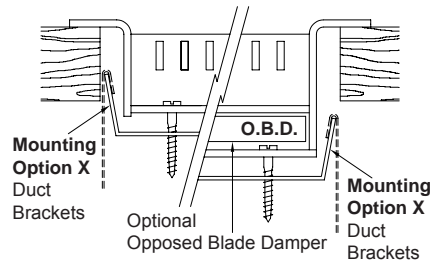

LOOSE ANGLE FRAME WITH MOUNTING LUGS



Qty.	Listed Size		Core Depth D	# Sect.	Core Style	Core Bar Centers	Frame Style	Sup. Bar Spacing	Material	Mtg. Option	Finish	Damper	Tag
	L	W											

To maintain KEES' policy of continuous product improvement, we reserve the right to change prices, specifications, ratings or dimensions without notice or obligation.

Project					Location				
Engineer					Dwg. No.	SD-GBG	KEES INCORPORATED 400 S. Industrial Dr. • P.O. Box L Elkhart Lake, WI 53020 Phone: (920) 876-3391 Fax: (920) 876-3065 Website: www.kees.com		
Architect					Date	11/09			
Contractor									