


GHD - HEAVY DUTY BAR GRILLES

SERIES II

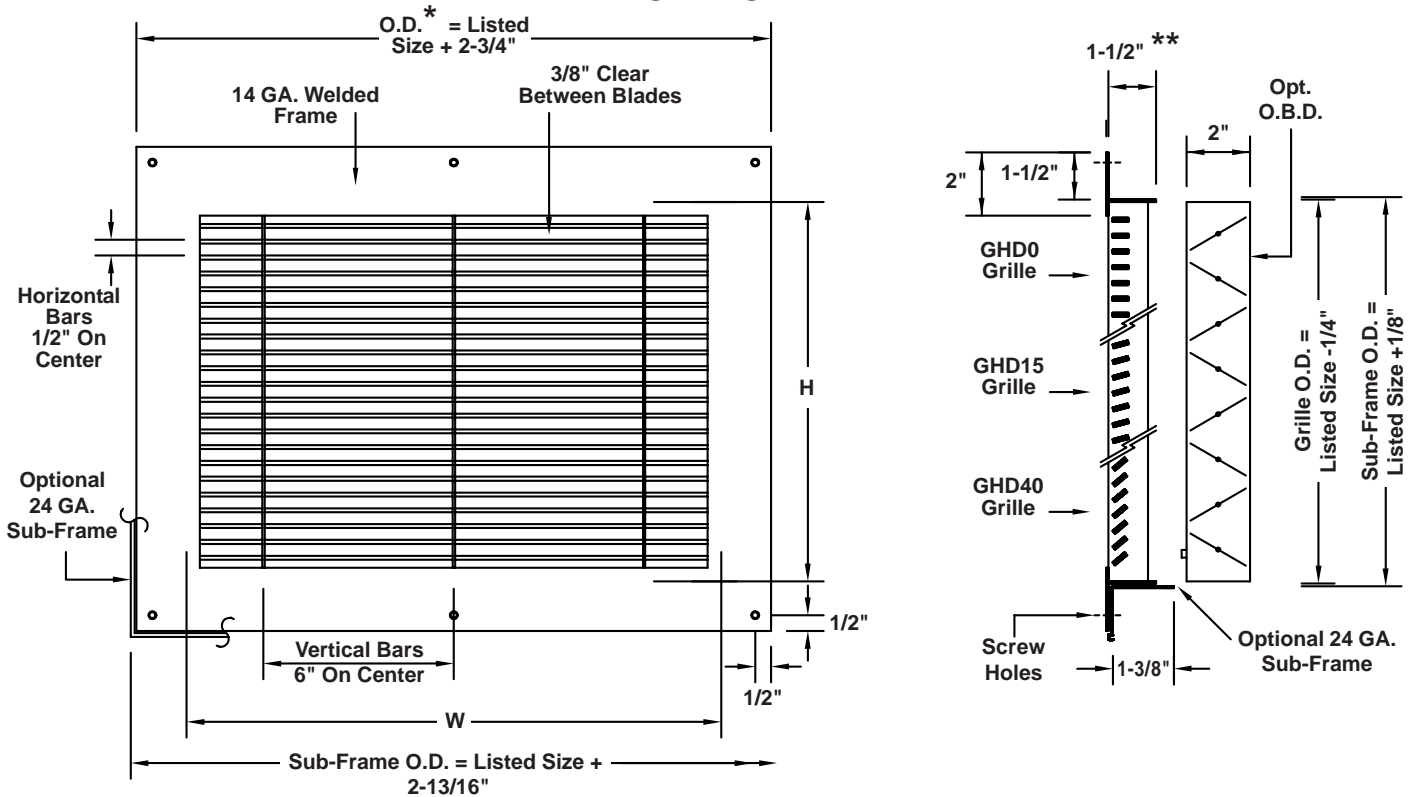

CONSTRUCTION:

- 14 gauge steel face plate.
Options: Face plate of any desired gauge.
- 1/8" x 1/2" horizontal blades on 1/2 inch centers penetrating 14 gauge vertical support bars on 6 inch centers and welded to sleeve.
Options: Blades at 0° (Designation GHD0), 15° (Designation GHD15) or 40° (Designation GHD40) deflection. Support bars on other centers.
- Sleeve 14 gauge steel 1-1/2 inches long welded to face plate.
Options: Sleeve of any desired gauge.
- Countersunk screw holes on maximum 10 inch centers with flat head screws.

* Grille without subframe. ** 4" with optional O.B.D.

STANDARD FINISHES:

- STEEL- Two part polyurethane white
- ALUMINUM - Mill finish
- STAINLESS STEEL - 304 or 316 mill finish.

OPTIONS:

- Aluminum construction (.10")
- Stainless steel construction (12 ga.)
- Extended sleeve
- Opposed blade damper
- No screw holes
- Sub-frame 24 ga.
- Two-part polyurethane white finish
- Other paint finishes
- Satin polish (stainless steel only)
- Clear or bronze anodized (aluminum only)
- Security screws

① NOTE: FOR SIZES OVER 48" IN EITHER DIMENSION FACE PLATE & SLEEVE CHANGE TO 10 GA. STEEL (.125" ALUM., 10 GA. S.S.).
MAXIMUM HEIGHT 96"; MAXIMUM WIDTH 96"; MAXIMUM 32 SQ. FT. TOTAL AREA.
LARGER SIZES AVAILABLE. CONSULT FACTORY FOR DIMENSIONS.

Qty.	Model	Listed Size		Deflection			Material	Sub-Frame	Damper	Finish	Tag
		W ①	H ①	0°	15°	40°					

To maintain KEES' policy of continuous product improvement, we reserve the right to change prices, specifications, ratings or dimensions without notice or obligation.

Project				Location			
Engineer				HD DIVISION OF KEES INC. 400 S. Industrial Dr. • P.O. Box L Elkhart Lake, WI 53020 Phone: (920) 876-3391 Fax: (920) 876-3065 Website: www.kees.com			
Architect		Dwg. No.	SD-GHD				
Contractor		Date	08/06				