

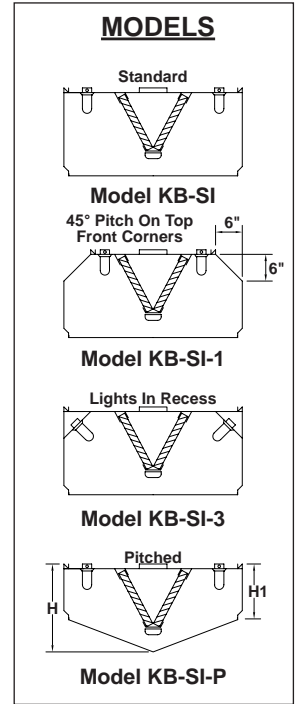


MODEL KB SINGLE ISLAND

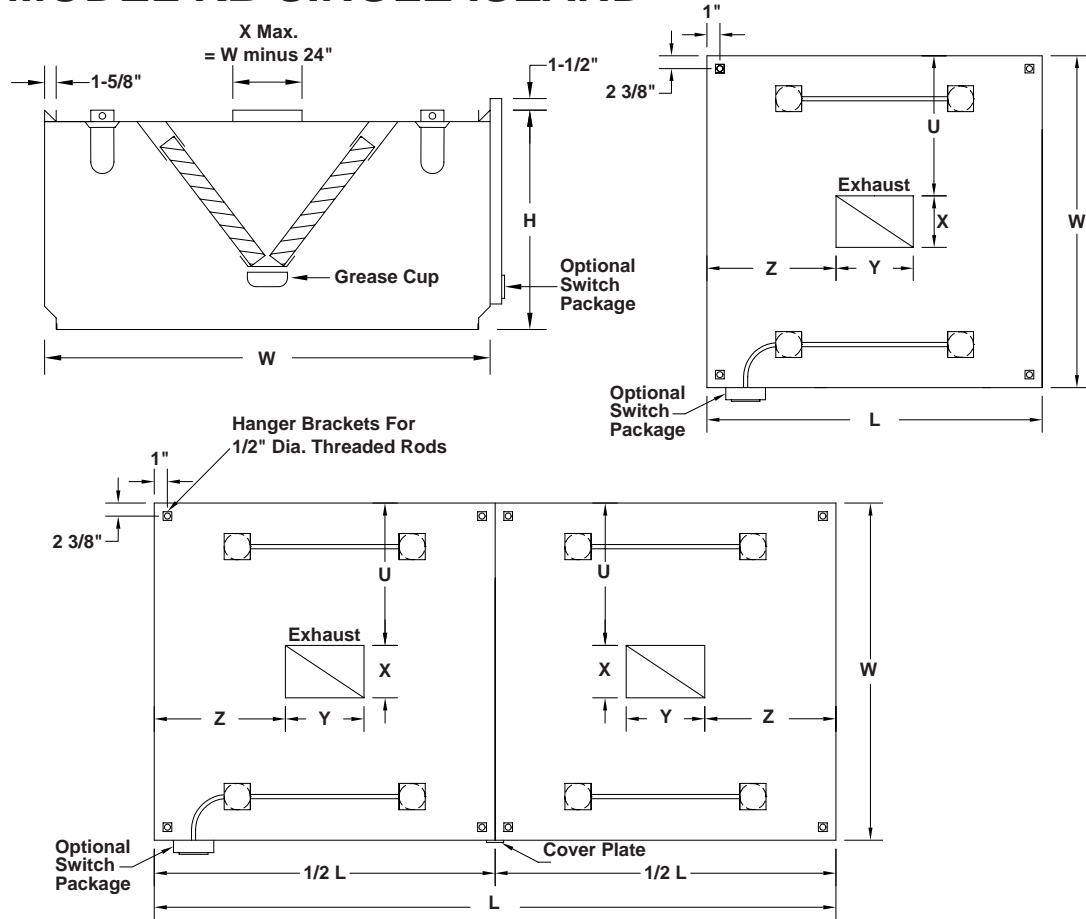

NSF Approved
Bottom Edges
On Front



| Quantity | Model | ① Material | ② Gauge | Hood Dimensions | | | ③ Number of Lights | Bottom Edge Type |
|----------|-------|------------|---------|-----------------|---|---|--------------------|------------------|
| | | | | L | W | H | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |

| ④ Factory Cut Opening | | | | ⑤ Filters | | | | ⑥ Finish | ⑦ Side Skirts | Other Options | Tag |
|-----------------------|---|---|---|-----------|----------|------|------|----------|---------------|---------------|-----|
| U | X | Y | Z | Type | Material | Qty. | Size | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |

- ① Type 304 stainless steel.
- ② 18 ga. is standard; other gauges available.
- ③ Standard is 100 watt vaporproof incandescent U.L. Listed for use on grease exhaust hood.
- ④ Two collars required on hood sections over 12' long.
- ⑤ Aluminum baffle type U.L. Classified filters standard.
- ⑥ #3 polish standard.
- ⑦ Advise if one or both sides. Make a sketch.
- ⑧ Optional exhaust air fire damper.
- ⑨ Optional switch package with surface mounted stainless steel cover and junction box on top of hood. (Fan switch with illuminated toggle).



U.L. File MH12960 (Without Exhaust Fire Damper)
 U.L. File MH12071 (With Exhaust Fire Damper)

Hood mounted Loose or wall mounting
 Number of light switches _____
 Number of fan switches _____ Voltage _____ 115V _____ 24V



To maintain KEES' policy of continuous product improvement, we reserve the right to change prices, specifications, ratings or dimensions without notice or obligation.

| | | | |
|------------|--|----------|----------|
| Project | | Location | |
| Engineer | | | |
| Architect | | Dwg. No. | SD-KB-SI |
| Contractor | | Date | 02/09 |

KEES INCORPORATED
 400 S. Industrial Dr. • P.O. Box L
 Elkhart Lake, WI 53020
 Phone: (920) 876-3391
 Fax: (920) 876-3065
 Website: www.kees.com