KS-200T WALL HOOD

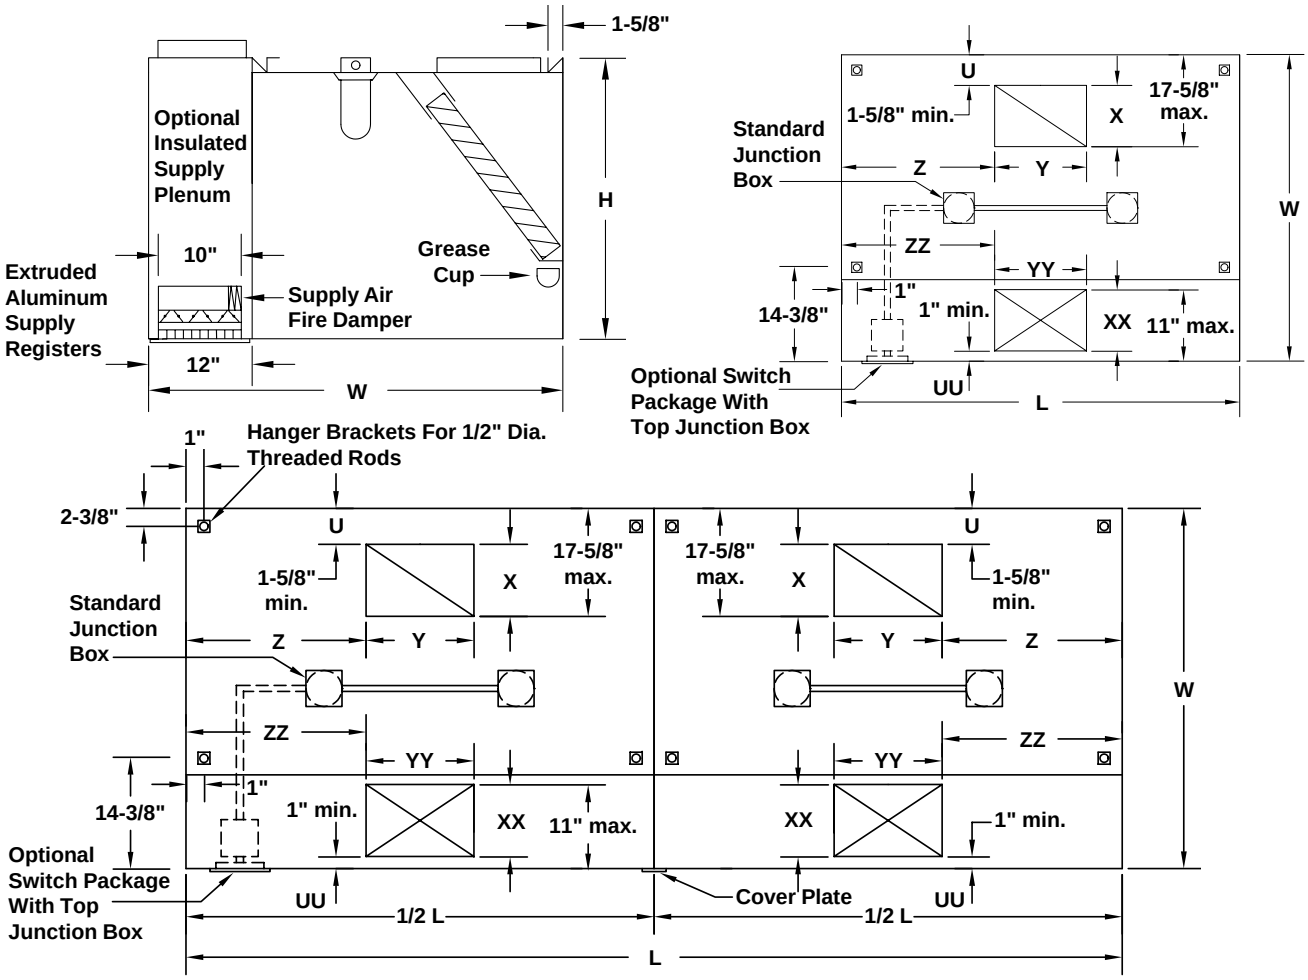

Quantity	① Material	② Gauge	Hood Dimensions			③ Number of Lights	④ Factory Cut Exhaust Opening			
			L	W	H		U	X	Y	Z

④ Factory Cut Supply Opening				⑤ Filters				⑥ Finish	Other Options	Tag
UU	XX	YY	ZZ	Type	Material	Quantity	Size			

① Type 304 stainless steel.

② 18 ga. standard; other gauges available.

③ Standard is 100 watt vaporproof incandescent U.L. Listed for use on grease exhaust hood.

④ 2 sets of collars required on hood sections over 12' long.

⑤ Aluminum baffle type U.L. Classified filters standard.

⑥ #3 polish standard.

c UL US LISTED ☐ U.L. File MH12960 (Without Exhaust Fire Damper)
☐ U.L. File MH12071 (With Exhaust Fire Damper)

⑦ Optional exhaust air fire damper.

⑧ Standard supply air fire damper.

⑨ Optional supply air collar balancing damper.

⑩ Optional switch package with flush mounted stainless steel cover and junction box on top of hood. (Fan switch with illuminated toggle).
☐ Hood mounted ☐ Loose for wall mounting
Number of light switches ___
Number of fan switches ___Voltage ___115V ___24V

⑪ Optional insulated plenum.

NSF

Project		Location	
Engineer			
Architect		Dwg No.	SD-KS-200T
Contractor		Date	04/96

KEES INCORPORATED
400 S. Industrial Dr. ▯ P.O. Box L
Elkhart Lake, WI 53020
Phone: (920) 876-3391
Fax: (920) 876-3065
Website: www.kees.com

To maintain KEES' policy of continuous product improvement, we reserve the right to change prices, specifications, ratings, or dimensions without prior notice or obligation.