

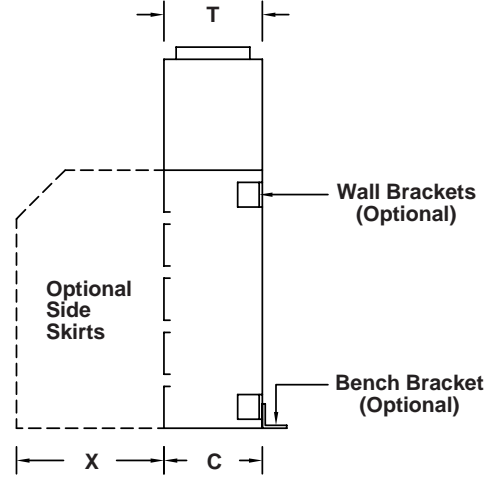


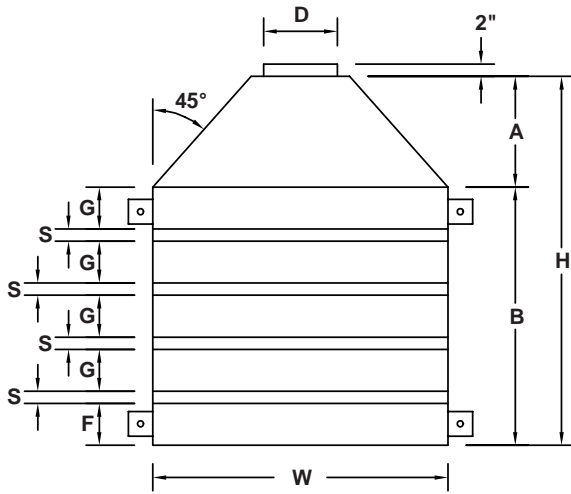

SLOTTED BACK SHELF INDUSTRIAL HOODS

TYPICAL USES: Welding, tank venting, high toxicity venting.

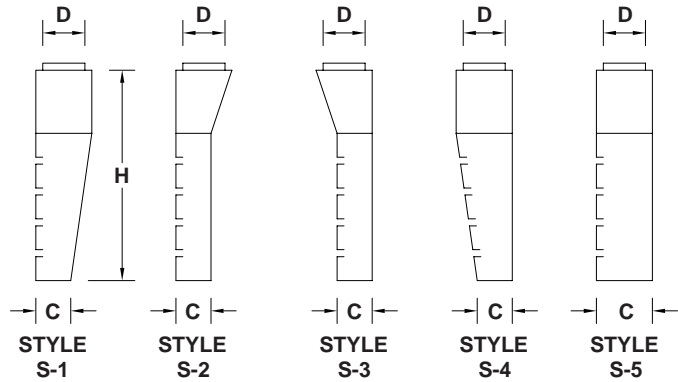

CFM GUIDELINES: 350 CFM per foot of hood width (W). Slots sized for 2,000 FPM.

CONSTRUCTION: All welded 18 GA. galvanized steel, 18 GA. 304 or 316 stainless steel with 2B finish or .063 aluminum. Heavier gauges available: 16, 14, 12 and 10.

DIMENSIONS: As required for job conditions. Available in single or multiple sections. Standard are four equally spaced 1/2 inch slots. All other number and widths of slots available.

Qty.	Style	Material	Gauge	No. of Sections	W	H	A	B	C	Nominal D	Actual O.D. / I.D.
F	G	T	No. of Slots	S	No. of Side Skirts	X	Finish	Options	Tag		

To maintain KEES' policy of continuous product improvement, we reserve the right to change prices, specifications, ratings or dimensions without notice or obligation.

Project		Location		<p>KEES INCORPORATED 400 S. Industrial Dr. • P.O. Box L Elkhart Lake, WI 53020 Phone: (920) 876-3391 Fax: (920) 876-3065 Website: www.kees.com</p>
Engineer		Dwg. No.	SD-SMBS	
Architect		Date	08/07	
Contractor				