


Model AD2-K shown

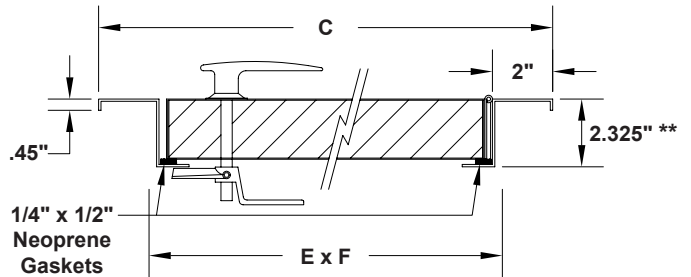

**** 4.325" for 4" thick doors (Model AD4-K)**

Standard construction to 4.5" S.P.
High pressure construction to 10" S.P.

Clear Opening Dimensions = Frame Neck O.D. Minus 2.0"

Qty.	Model	Size	Frame Neck O.D. Nominal Size		Frame Outside Dimension		Duct Opening Dimension		No. of Latches	No. of High Pressure Latches	Opt. Window Door Hinging *		Construction Details
			A	B	C	D	E	F			Right	Left	
		18 x 36	18	36	21.850	39.850	18-1/4	36-1/4	2	2			Hinge always furnished on height "B" dimension.
		18 x 48	18	48	21.850	51.850	18-1/4	48-1/4	2	3			* Advise on models with window if hinge is on left or right side, facing door from outside.
		18 x 54	18	54	21.850	57.850	18-1/4	54-1/4	2	3			FLANGED FRAME 14 ga. galvanized steel.
		18 x 60	18	60	21.850	63.850	18-1/4	60-1/4	2	3			DOOR PANEL 18 ga. galvanized steel.
		18 x 72	18	72	21.850	75.850	18-1/4	72-1/4	2	3			HANDLES Ventlok #260 -shipped loose for field installation on 2" models or similar handle on 4" models. Work from inside and outside.
		18 x 84	18	84	21.850	87.850	18-1/4	84-1/4	3	3			INSULATION 2 in. or 4 in. fiberglass.
		18 x 96	18	96	21.850	99.850	18-1/4	96-1/4	3	3			GASKET Closed cell neoprene gasket.
		24 x 36	24	36	27.850	39.850	24-1/4	36-1/4	2	4			HINGE Continuous steel - zinc-plated riveted to frame and door.
		24 x 48	24	48	27.850	51.850	24-1/4	48-1/4	2	5			OPT. S.S. CONSTRUCTION S.S. door, frame and hinge. Ventlok handle standard. <input type="checkbox"/> S.S. "T" handle optional. <input type="checkbox"/>
		24 x 54	24	54	27.850	57.850	24-1/4	54-1/4	2	5			OPT. ALL ALUM. CONSTRUCTION Standard construction with aluminum door, frame and hinge.
		24 x 60	24	60	27.850	63.850	24-1/4	60-1/4	2	5			All materials are mill finish.
		24 x 72	24	72	27.850	75.850	24-1/4	72-1/4	2	5			Optional Models AD2G-K, AD2G-K-HP, AD4G-K and AD4G-K-HP include 6-3/4" round plexiglass view-port.
		24 x 84	24	84	27.850	87.850	24-1/4	84-1/4	3	5			Optional high pressure Models AD2-K-HP, AD2G-K-HP, AD4-K-HP and AD4G-K-HP have all caulked joints.
		24 x 96	24	96	27.850	99.850	24-1/4	96-1/4	3	5			
		30 x 60	30	60	33.850	63.850	30-1/4	60-1/4	2	5			
		30 x 72	30	72	33.850	75.850	30-1/4	72-1/4	2	5			
		30 x 84	30	84	33.850	87.850	30-1/4	84-1/4	3	5			
		30 x 96	30	96	33.850	99.850	30-1/4	96-1/4	3	5			
		36 x 60	36	60	39.850	63.850	36-1/4	60-1/4	2	5			
		36 x 72	36	72	39.850	75.850	36-1/4	72-1/4	2	5			
		36 x 84	36	84	39.850	87.850	36-1/4	84-1/4	3	5			
		36 x 96	36	96	39.850	99.850	36-1/4	96-1/4	3	5			

To maintain KEES' policy of continuous product development, we reserve the right to change prices, specifications, ratings and dimensions without notice or obligation.

Project		Location	
Engineer			
Architect		Dwg. No.	SD-AD2-4-K
Contractor		Date	04/17




KEES INCORPORATED
400 S. Industrial Dr.
Elkhart Lake, WI 53020
Phone: (920) 876-3391
Fax: (920) 876-3065
Website: www.kees.com



WALK-IN STYLE ACCESS DOORS

MODELS AD2-K-IN and AD4-K-IN

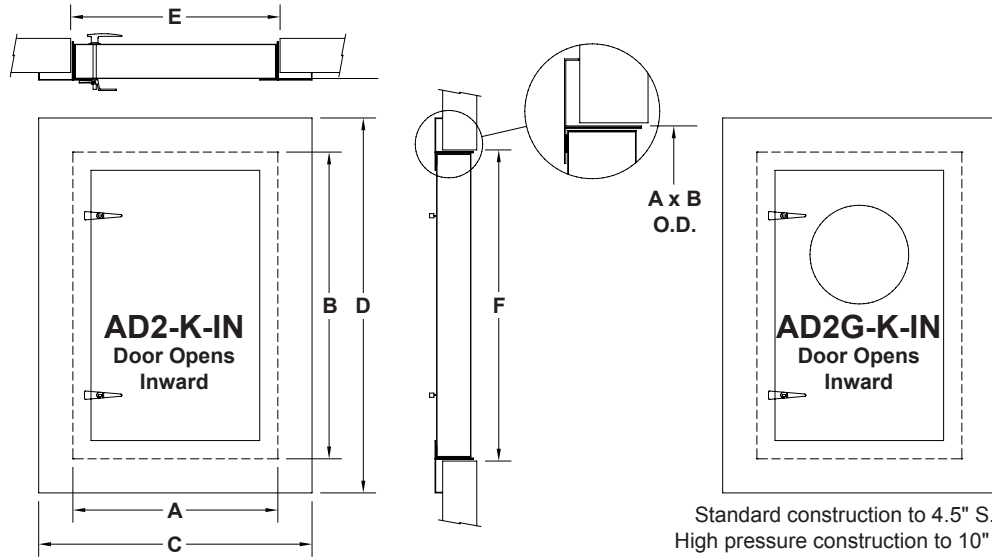

Standard construction to 4.5" S.P.
High pressure construction to 10" S.P.

Clear Opening Dimensions = Frame Neck O.D. Minus 2.0"

Qty.	Model	Size	Frame Neck O.D. Nominal Size		Frame Outside Dimension		Duct Opening Dimension		No. of Latches	High Pressure No. of Latches	Opt. Window Door Hinging *		Construction Details
			A	B	C	D	E	F			Right	Left	
		18 x 36	18	36	21.850	39.850	18-1/4	36-1/4	2	2			Hinge always furnished on height "B" dimension. Advise if hinge is on left or right side, facing door from outside.
		18 x 48	18	48	21.850	51.850	18-1/4	48-1/4	2	3			
		18 x 54	18	54	21.850	57.850	18-1/4	54-1/4	2	3			
		18 x 60	18	60	21.850	63.850	18-1/4	60-1/4	2	3			
		18 x 72	18	72	21.850	75.850	18-1/4	72-1/4	2	3			
		18 x 84	18	84	21.850	87.850	18-1/4	84-1/4	3	3			
		18 x 96	18	96	21.850	99.850	18-1/4	96-1/4	3	3			FLANGED FRAME 14 ga. galvanized steel.
													DOOR PANEL 18 ga. galvanized steel.
													HANDLES Ventlok #260 - shipped loose for field installation on 2" models or similar handle on 4" models. Work from inside and outside.
		24 x 36	24	36	27.850	39.850	24-1/4	36-1/4	2	4			INSULATION 2 in. or 4 in. fiberglass.
		24 x 48	24	48	27.850	51.850	24-1/4	48-1/4	2	5			
		24 x 54	24	54	27.850	57.850	24-1/4	54-1/4	2	5			
		24 x 60	24	60	27.850	63.850	24-1/4	60-1/4	2	5			
		24 x 72	24	72	27.850	75.850	24-1/4	72-1/4	2	5			
		24 x 84	24	84	27.850	87.850	24-1/4	84-1/4	3	5			
		24 x 96	24	96	27.850	99.850	24-1/4	96-1/4	3	5			GASKET Closed cell neoprene gasket.
													HINGE Continuous steel - zinc-plated riveted to frame and door.
													OPTIONAL S.S. CONSTRUCTION Stainless steel door, frame and hinge. Ventlok handle standard. <input type="checkbox"/> S.S. "T" handle optional. <input type="checkbox"/>
		30 x 60	30	60	33.850	63.850	30-1/4	60-1/4	2	5			OPT. ALL ALUM. CONSTRUCTION Standard construction with aluminum door, frame and hinge.
		30 x 72	30	72	33.850	75.850	30-1/4	72-1/4	2	5			
		30 x 84	30	84	33.850	87.850	30-1/4	84-1/4	3	5			
		30 x 96	30	96	33.850	99.850	30-1/4	96-1/4	3	5			
													OPTIONAL PLEXIGLASS VIEW-PORT 6-3/4" round double pane (Models AD2G-K-IN and AD2G-K-IN-HP). * Advise if hinge is on left or right side, facing door from outside.
		36 x 60	36	60	39.850	63.850	36-1/4	60-1/4	2	5			OPTIONAL HIGH PRESSURE MODELS Models AD2-K-IN-HP, AD2G-K-IN-HP, AD4-K-IN-HP and AD4G-K-IN-HP have all caulked joints.
		36 x 72	36	72	39.850	75.850	36-1/4	72-1/4	2	5			
		36 x 84	36	84	39.850	87.850	36-1/4	84-1/4	3	5			
		36 x 96	36	96	39.850	99.850	36-1/4	96-1/4	3	5			
													All materials are mill finish.


To maintain KEES' policy of continuous product development, we reserve the right to change prices, specifications, ratings and dimensions without notice or obligation.

Project				Location			
Engineer							
Architect				Dwg. No.	SD-AD2K-IN		
Contractor				Date	04/17		



KEES INCORPORATED
400 S. Industrial Dr.
Elkhart Lake, WI 53020
Phone: (920) 876-3391
Fax: (920) 876-3065
Website: www.kees.com


**Model
AD-2K-Two Panel**

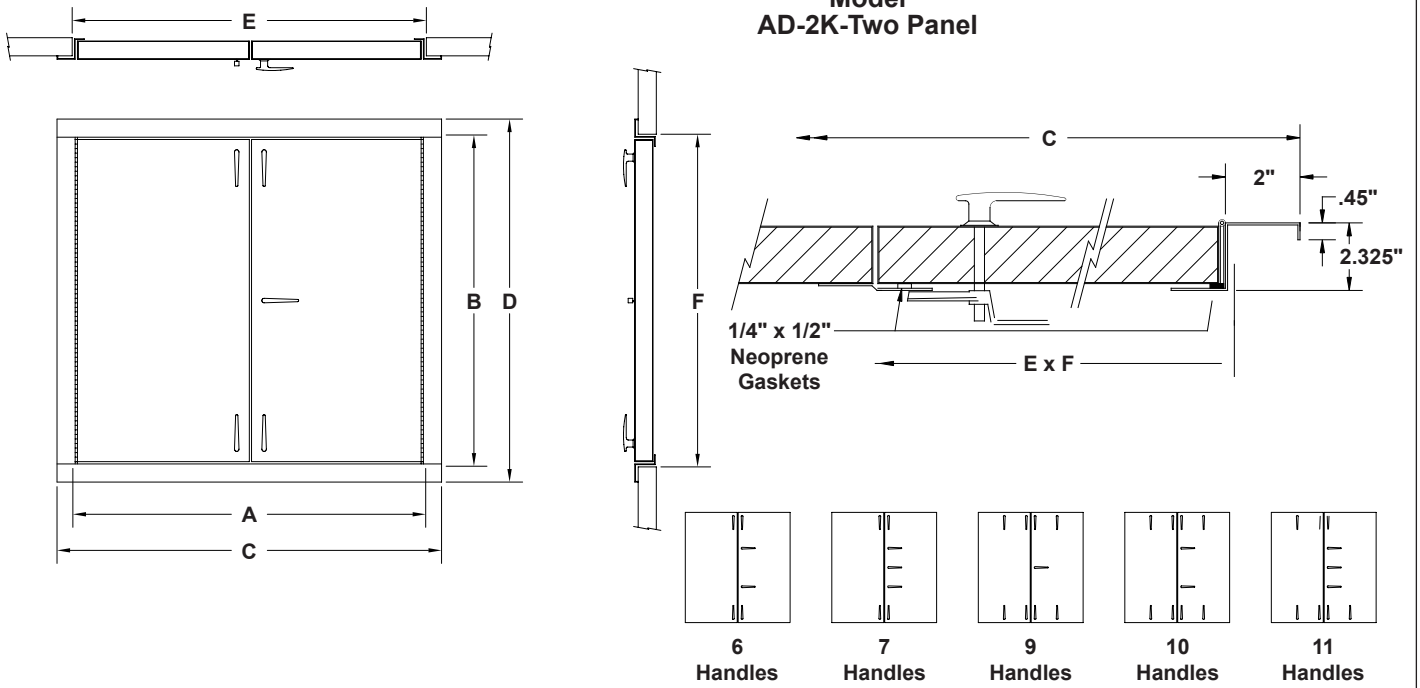

Clear Opening Dimensions = Frame Neck O.D. Minus 2.0"

Qty.	Model	Size	Frame Neck O.D. Nominal Size		Frame Outside Dimension		Duct Opening Dimension		No. of Latches	Construction Details
			A	B	C	D	E	F		
		48" x 36"	48"	36"	52"	40"	48-1/4"	36-1/4"	5	Hinge always furnished on height "B" dimension. FLANGED FRAME 14 ga. galvanized steel. 12 ga. on doors 96" high. DOOR PANEL 18 ga. galvanized steel. HANDLES Ventlok #260 - shipped loose for field installation. Work from inside and outside. INSULATION 2 in. fiberglass. GASKET Closed cell neoprene gasket. HINGE Continuous steel - zinc-plated riveted to frame and door. OPTIONAL S.S. CONSTRUCTION Stainless steel door, frame and hinge. Ventlok handle standard. <input type="checkbox"/> S.S. "T" handle optional. <input type="checkbox"/> OPT. ALL ALUM. CONSTRUCTION Standard construction with aluminum door, frame and hinge. All materials are mill finish. Standard construction to 4.5" S.P.
		48" x 48"	48"	48"	52"	52"	48-1/4"	48-1/4"	5	
		48" x 54"	48"	54"	52"	58"	48-1/4"	54-1/4"	6	
		48" x 60"	48"	60"	52"	64"	48-1/4"	60-1/4"	6	
		48" x 72"	48"	72"	52"	76"	48-1/4"	72-1/4"	6	
		48" x 84"	48"	84"	52"	88"	48-1/4"	84-1/4"	7	
		48" x 96"	48"	96"	52"	100"	48-1/4"	96-1/4"	7	

To maintain KEE'S policy of continuous product development, we reserve the right to change prices, specifications, ratings and dimensions without notice or obligation.

Project		Location	
Engineer		 KEES INCORPORATED 400 S. Industrial Dr. Elkhart Lake, WI 53020 Phone: (920) 876-3391 Fax: (920) 876-3065 Website: www.kees.com	
Architect			Dwg. No.
Contractor		Date	12/16