



DUCT ACCESS DOORS 2" INSULATED PANELS

STANDARD SIZES

Quantity		Size	Dim. A Width	Dim. B Height	Frame Neck O.D.	No. of Cams ADC-2	No. of Cams ADH-2	Option(s)
ADC-2	ADH-2							
		6 x 6	6	6	4-7/8" x 4-7/8"	2	1	
		8 x 8	8	8	6-7/8" x 6-7/8"	2	1	
		10 x 10	10	10	8-7/8" x 8-7/8"	2	1	
		12 x 12	12	12	10-7/8" x 10-7/8"	2	1	
		14 x 14	14	14	12-7/8" x 12-7/8"	2	1	
		16 x 16	16	16	14-7/8" x 14-7/8"	4	2	
		18 x 18	18	18	16-7/8" x 16-7/8"	4	2	
		20 x 20	20	20	18-7/8" x 18-7/8"	4	2	
		24 x 24	24	24	22-7/8" x 22-7/8"	4	2	
		24 x 36	24	36	22-7/8" x 34-7/8"	6	3	

SPECIFICATIONS:

- DOOR PANEL:
24 ga. galvanized steel
- FRAME:
22 ga. galvanized steel
- INSULATION:
2" fiberglass
- PRE-FORMED TABS:
22 ga. galvanized steel
- CAMS & STRIKERS:
galvanized steel
- HINGE:
plated steel

OPTIONAL CONSTRUCTION:


- .032" aluminum with aluminum hinge and/or plated steel cams & strikers
- 24 gauge stainless steel with stainless steel hinge and/or cams & strikers

OTHER OPTIONS:

- Chain (ADC only)
- Hasp (ADH only)
- Padlock eyes (ADH only)
- Optional Window
- DP - Plexiglass
- DL - Lexan
- DG - Laminated Safety Glass

Standard construction to 4.5" S.P.

TYPICAL DOUBLE PANEL ACCESS DOOR

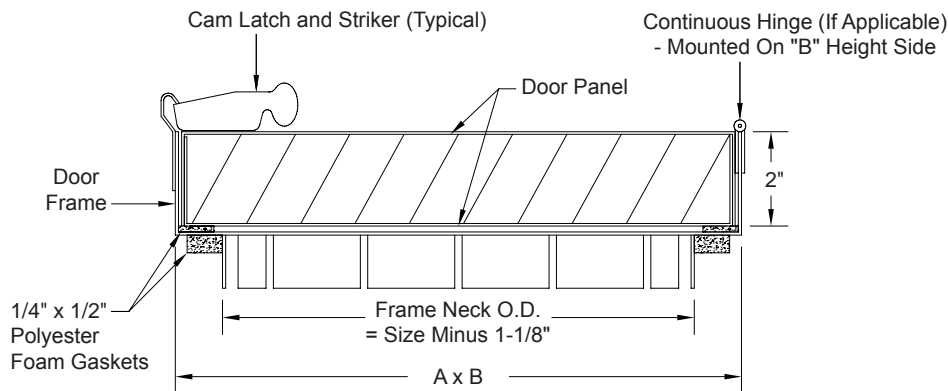

To maintain KEES' policy of continuous product development, we reserve the right to change prices, specifications, ratings and dimensions without notice or obligation.

Project		Location	
Engineer		Dwg. No.	SD-ADC-2
Architect		Date	04/12
Contractor			



KEES INCORPORATED
400 S. Industrial Dr.
Elkhart Lake, WI 53020
Phone: (920) 876-3391
Fax: (920) 876-3065
Website: www.kees.com