
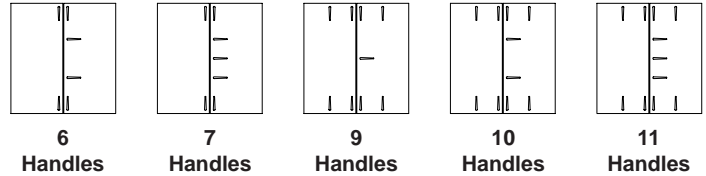

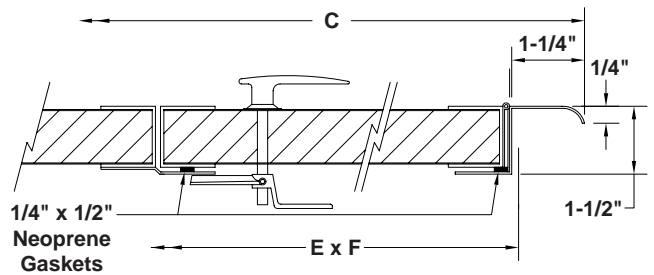
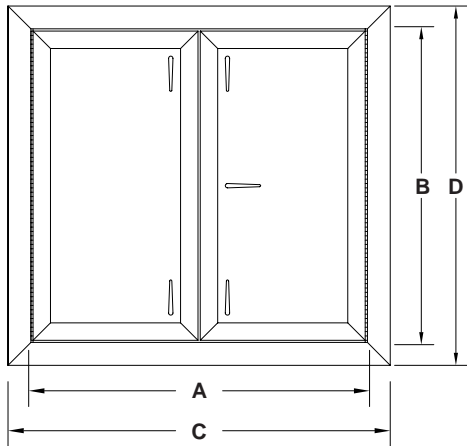


(IN-HOUSE USE ONLY)


Model  
AD-K-Two Panel



Clear Opening Dimensions = Frame Neck O.D. Minus 2.125"

Qty.	Model	Size	Frame Neck O.D. Nominal Size		Frame Outside Dimension		Duct Opening Dimension		No. of Latches	Construction Details
			A	B	C	D	E	F		
		48 x 36	48	36	50-1/2	38-1/2	48-1/4	36-1/4	5	Hinge always furnished on height "B" dimension. <b>FLANGED FRAME</b> .060 - 6063 extruded aluminum <b>DOOR PANEL FRAME</b> .060 - 6063 extruded aluminum <b>DOOR PANEL</b> 24 ga. galvanized steel <b>HANDLES</b> Work from inside and outside <b>INSULATION</b> 1 in. fiberglass <b>GASKET</b> Closed cell neoprene gasket <b>HINGE</b> Continuous steel - zinc-plated <b>OPTIONAL FABRICATED FRAME</b> 14 ga. galvanized steel <b>OPTIONAL S.S. CONSTRUCTION</b> Stainless steel door, frame and hinge <b>OPTIONAL ALL ALUM. CONSTRUCTION</b> Standard construction with aluminum door panel  All materials are mill finish. Standard construction to 4.5" S.P.
		48 x 48	48	48	50-1/2	50-1/2	48-1/4	48-1/4	5	
		48 x 54	48	54	50-1/2	56-1/2	48-1/4	54-1/4	6	
		48 x 60	48	60	50-1/2	62-1/2	48-1/4	60-1/4	6	
		48 x 72	48	72	50-1/2	74-1/2	48-1/4	72-1/4	6	
		48 x 84	48	84	50-1/2	86-1/2	48-1/4	84-1/4	7	
		48 x 96	48	96	50-1/2	98-1/2	48-1/4	96-1/4	7	

To maintain KEES' policy of continuous product improvement, we reserve the right to change prices, specifications, ratings or dimensions without notice or obligation.

<b>Project</b>		<b>Location</b>		 <b>KEES INCORPORATED</b> 400 S. Industrial Dr. • P.O. Box L Elkhart Lake, WI 53020 Phone: (920) 876-3391 Fax: (920) 876-3065 Website: www.kees.com
<b>Engineer</b>		<b>Dwg. No.</b>	<b>SD-ADK TWO PANEL</b>	
<b>Architect</b>		<b>Date</b>	<b>12/08</b>	
<b>Contractor</b>				