
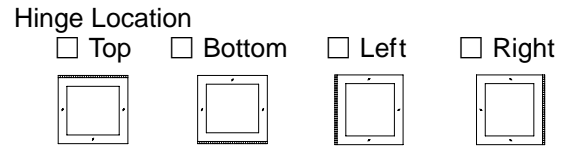


GHD-HG HINGED HEAVY DUTY STEEL GRILLE & GHD-HFG HINGED HEAVY DUTY STEEL FILTER GRILLE

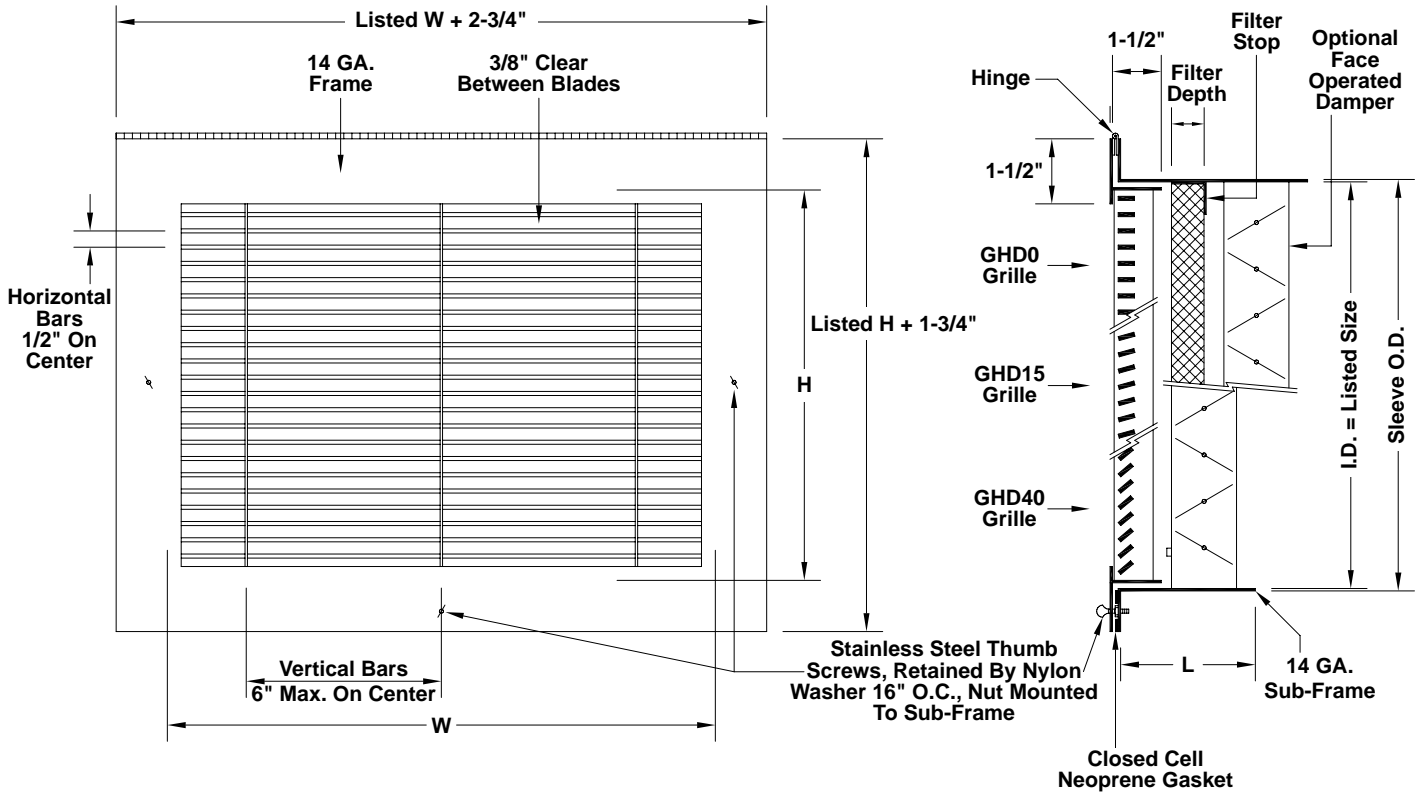

CONSTRUCTION:

- 14 gauge steel face plate and sleeve.
- 1/8" x 1/2" horizontal blades on 1/2 inch centers penetrating 14 gauge vertical support bars on 6 inch centers and welded to sleeve. Options: Blades at 0° (Designation GHD0), 15° (Designation GHD15) or 40° (Designation GHD40) deflection. Support bars on other centers.
- Sub-frame 14 gauge steel. Length varies with filter depth and options.
- Finish: 2 part polyurethane white.
- Filter by others. (GHD-HFG)

STANDARD FINISHES:

- STEEL- Two part polyurethane white.
- ALUMINUM - Mill finish or white.

OPTIONS:

- Aluminum construction (.10")
- Extended sleeve
- Opposed blade damper
- Other paint finishes
- Filter clips (GHD-HFG)

FILTER(S) BY KEES:

- Washable Aluminum Mesh
- Throw Away

Qty.	Listed Size		Deflection			Sleeve Length L	Filter Depth	Damper	Finish	Other Options	Tag
	W	H	0°	15°	40°						


To maintain KEES' policy of continuous product development, we reserve the right to change prices, specifications, ratings and dimensions without notice or obligation.

Project		Location	
Engineer			
Architect		Dwg. No.	SD-GHD-HG & HFG
Contractor		Date	01/14



KEES INCORPORATED
 400 S. Industrial Dr.
 Elkhart Lake, WI 53020
 Phone: (920) 876-3391
 Fax: (920) 876-3065
 Website: www.kees.com

GHD-HG HINGED HEAVY DUTY S.S. GRILLE & GHD-HFG HINGED HEAVY DUTY S.S. FILTER GRILLE

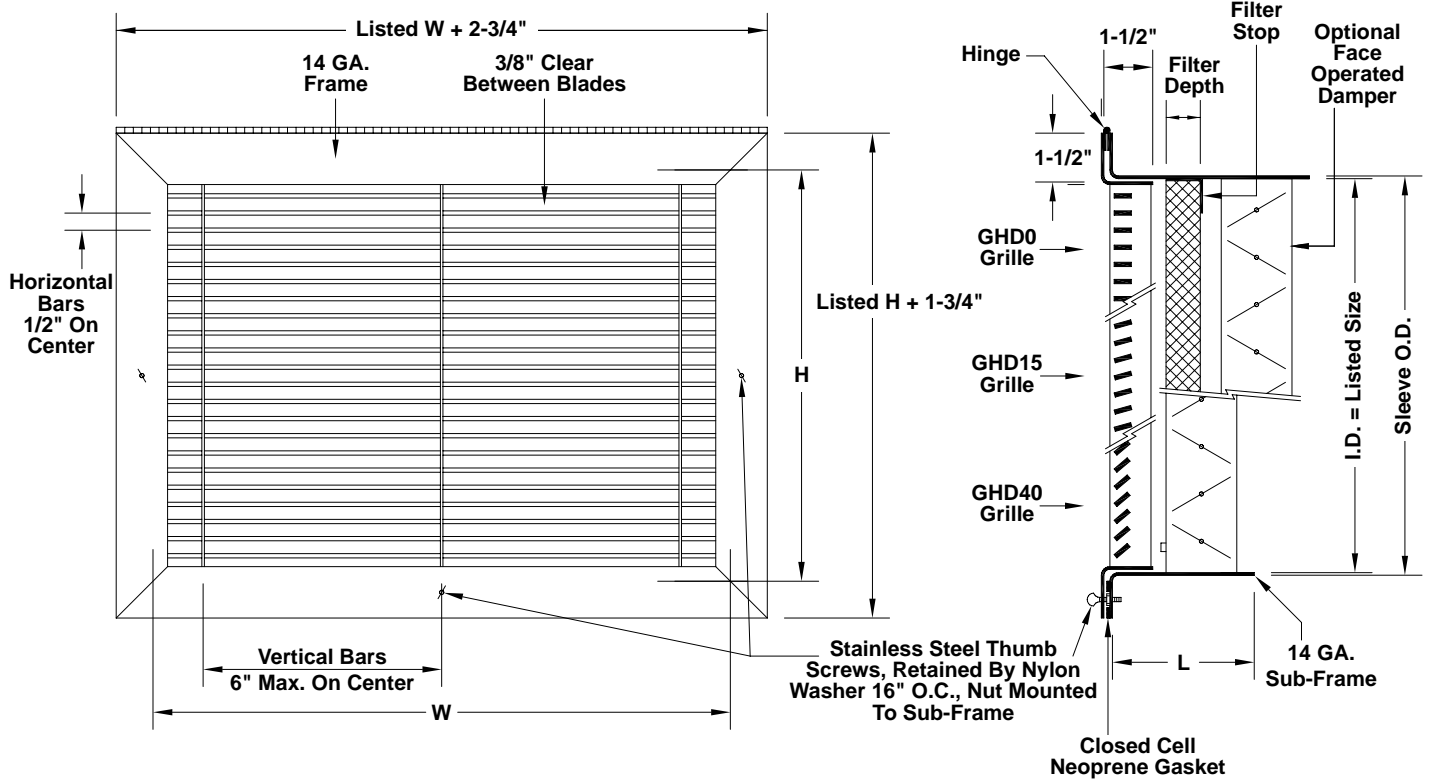

Hinge Location

- Top
 Bottom
 Left
 Right



CONSTRUCTION:

- 14 gauge stainless steel face plate and sleeve.
- $1/8" \times 1/2"$ horizontal blades on $1/2$ inch centers penetrating 14 gauge vertical support bars on 6 inch centers and welded to sleeve. Options: Blades at 0° (Designation GHD0), 15° (Designation GHD15) or 40° (Designation GHD40) deflection. Support bars on other centers.
- Sub-frame 14 gauge stainless steel. Length varies with filter depth and options.
- Finish: 2 part polyurethane white.
- Filter by others. (GHD-HFG)

STANDARD FINISHES:

- STAINLESS STEEL - 304 or 316 satin finish.

OPTIONS:

- Extended sleeve
- Opposed blade damper
- Two-part polyurethane white finish
- Other paint finishes
- Mill finish (industrial grade) blades (stainless steel only)
- Filter clips (GHD-HFG)

FILTER(S) BY KEES:

- Washable Aluminum Mesh
 Throw Away

Qty.	Listed Size		Deflection			Sleeve Length L	Filter Depth	Damper	Finish	Other Options	Tag
	W	H	0°	15°	40°						

To maintain KEES' policy of continuous product development, we reserve the right to change prices, specifications, ratings and dimensions without notice or obligation.

Project		Location	
Engineer			
Architect		Dwg. No.	SD-GHD-HG & HFG
Contractor		Date	01/14



KEES INCORPORATED
 400 S. Industrial Dr.
 Elkhart Lake, WI 53020
 Phone: (920) 876-3391
 Fax: (920) 876-3065
 Website: www.kees.com