## Model
## AD-2K-Two Panel

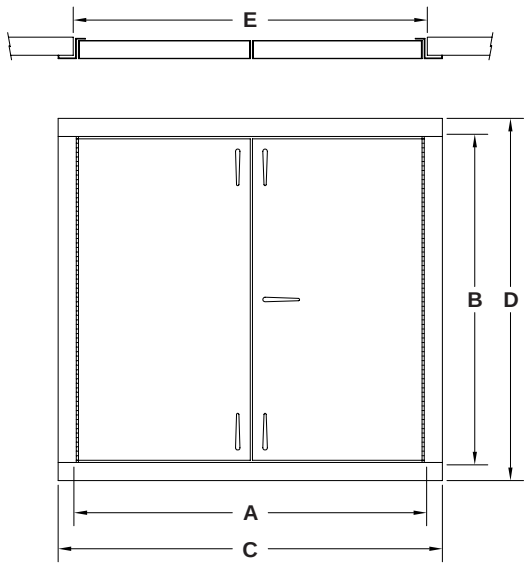


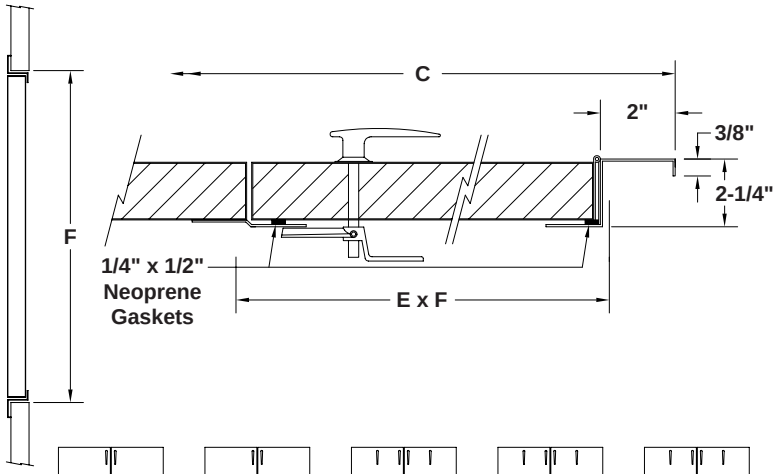


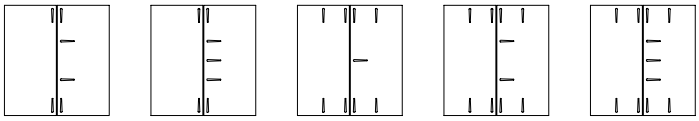

6 Handles | 7 Handles | 9 Handles | 10 Handles | 11 Handles

| Qty. | Model | Size | Frame Neck O.D. Nominal Size A | B | Frame Outside Dimension C | D | Duct Opening Dimension E | F | No. of Latches |
|---|---|---|---|---|---|---|---|---|---|
| | | 48 x 36 | 48 | 36 | 52 | 40 | 52-1/4 | 36-1/4 | 5 |
| | | 48 x 48 | 48 | 48 | 52 | 52 | 52-1/4 | 48-1/4 | 5 |
| | | 48 x 54 | 48 | 54 | 52 | 58 | 52-1/4 | 54-1/4 | 6 |
| | | 48 x 60 | 48 | 60 | 52 | 64 | 52-1/4 | 60-1/4 | 6 |
| | | 48 x 72 | 48 | 72 | 52 | 76 | 52-1/4 | 72-1/4 | 6 |
| | | 48 x 84 | 48 | 84 | 52 | 88 | 52-1/4 | 84-1/4 | 7 |
| | | 48 x 96 | 48 | 96 | 52 | 100 | 52-1/4 | 96-1/4 | 7 |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |

**Construction Details**

Hinge always furnished on height "B" dimension.

**FLANGED FRAME**
14 ga. galvanized steel
12 ga. on doors 96" high

**DOOR PANEL**
20 ga. galvanized steel
18 ga. on doors wider than 18"

**HANDLES**
Ventlock #260 - shipped loose for field installation
Work from inside and outside

**INSULATION**
2 in. fiberglass

**GASKET**
Closed cell neoprene gasket

**HINGE**
Continuous steel - zinc-plated

All materials are mill finish.

Standard construction to 4.5" S.P.

To maintain KEES' policy of continuous product improvement, we reserve the right to change prices, specifications, ratings or dimensions without notice or obligation.

| | | | |
|---|---|---|---|
| **Project** | | **Location** | |
| **Engineer** | | | |
| **Architect** | | **Dwg. No.** | **SD-AD2-K TWO PANEL** |
| **Contractor** | | **Date** | **06/08** |

**KEES INCORPORATED**
400 S. Industrial Dr. • P.O. Box L
Elkhart Lake, WI 53020
Phone: (920) 876-3391
Fax: (920) 876-3065
Website: www.kees.com