

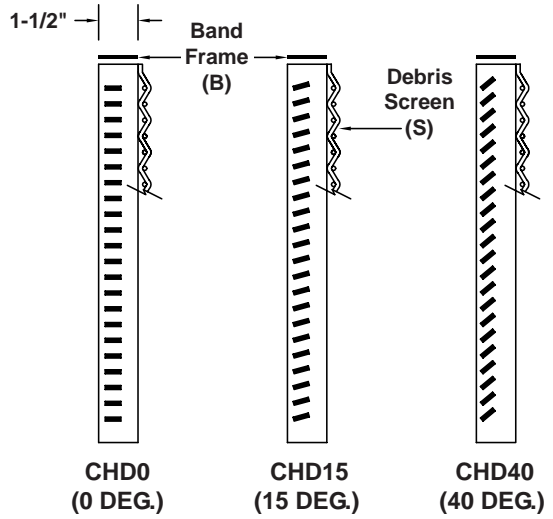


CHD - GRILLE CORES SERIES II

OPTIONS

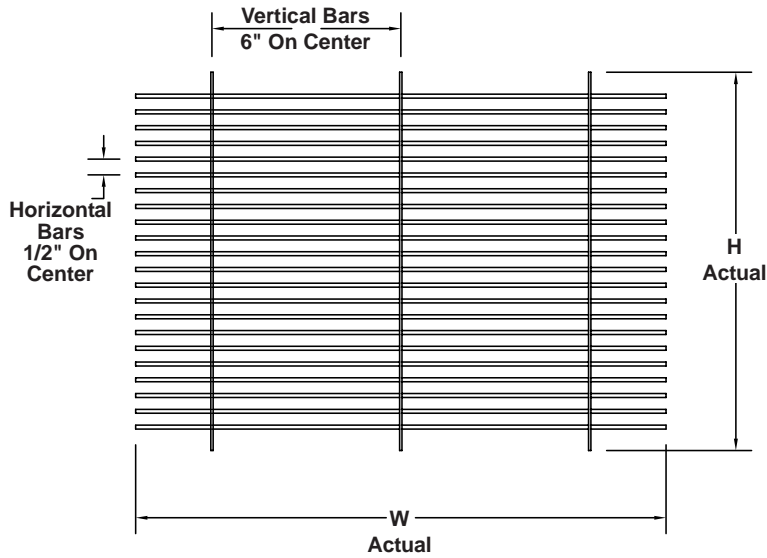

FASTENING LUGS / LOOSE ANGLE FRAME WITH MOUNTING LUGS

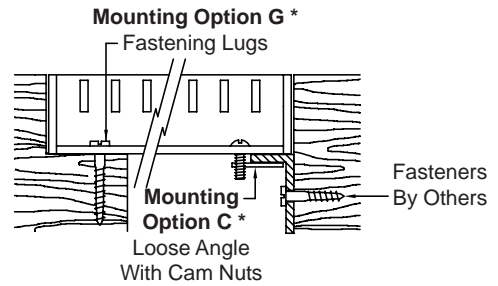

* Not available on 40 degree core.

CONSTRUCTION:

- 1/8" x 1/2" horizontal blades on 1/2 inch centers penetrating 14 gauge vertical support bars on 6 inch centers.
- Options: Blades at 0° (Designation CHD0), 15° (Designation CHD15) or 40° (Designation CHD40) deflection.
- Support bars on other centers.

STANDARD FINISHES:

- Steel - Two part polyurethane white.
- Aluminum - Mill finish.
- Stainless Steel - 304 or 316 mill finish.

OPTIONS (Suffix):

- B- Band frame around perimeter.
- C- Loose mounting angle with cam nuts (0° and 15° only).
- G- Fastening lugs (0° and 15° only).
- S- Debris screen.

OPTIONAL FINISHES:

- Two-part polyurethane white finish.
- Other paint finishes.
- Clear or bronze anodized. (aluminum only).
- Satin polish (stainless steel only).

Qty.	Model	Actual O.D.		Deflection			Material	Options	Finish	Tag
		W	H	0°	15°	40°				

To maintain KEESS' policy of continuous product improvement, we reserve the right to change prices, specifications, ratings or dimensions without notice or obligation.

Project		Location		
Engineer				HD DIVISION OF KEESS INC. 400 S. Industrial Dr. • P.O. Box L Elkhart Lake, WI 53020 Phone: (920) 876-3391 Fax: (920) 876-3065 Website: www.keess.com
Architect		Dwg. No.	SD-CHD	
Contractor		Date	08/05	