



# DUCT ACCESS DOORS

## STANDARD SIZES

Quantity		Size	Dim. A Width	Dim. B Height	Frame Neck O.D.	Cams ADC	Cams ADH
ADC-D	ADH-D						
		6 x 6	6	6	4-7/8" x 4-7/8"	2	1
		8 x 8	8	8	6-7/8" x 6-7/8"	2	1
		10 x 10	10	10	8-7/8" x 8-7/8"	2	1
		12 x 12	12	12	10-7/8" x 10-7/8"	2	1
		14 x 14	14	14	12-7/8" x 12-7/8"	2	1
		16 x 16	16	16	14-7/8" x 14-7/8"	4	2
		18 x 18	18	18	16-7/8" x 16-7/8"	4	2
		20 x 20	20	20	18-7/8" x 18-7/8"	4	2
		24 x 24	24	24	22-7/8" x 22-7/8"	4	2
		24 x 36	24	36	22-7/8" x 34-7/8"	6	3

### SPECIFICATIONS:


- DOOR PANEL:  
24 gauge galvanized steel
- FRAME:  
22 gauge galvanized steel
- INSULATION:  
1" fiberglass
- PRE-FORMED TABS:  
22 gauge galvanized steel

### OPTIONAL CONSTRUCTION:

- .032" aluminum with plated steel cams and strikers
- 24 gauge stainless steel with stainless steel cams and strikers

Standard construction to 4.5" S.P.  
High pressure construction available (see Model ADC-HP).

### TYPICAL DOUBLE PANEL ACCESS DOOR

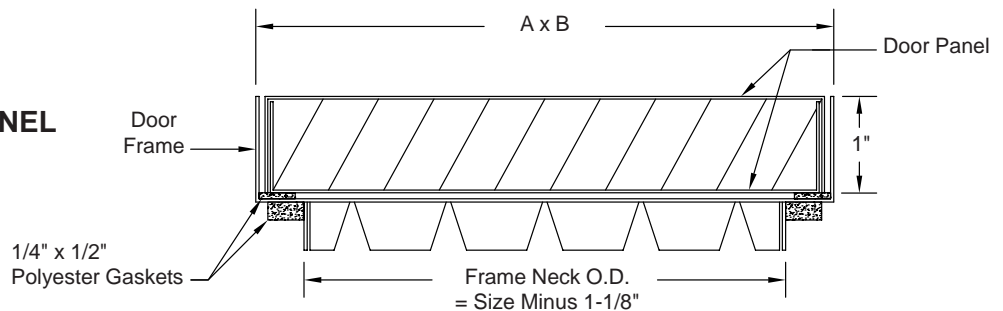

To maintain KEES' policy of continuous product improvement, we reserve the right to change prices, specifications, ratings or dimensions without notice or obligation.

<b>Project</b>		<b>Location</b>	
<b>Engineer</b>			
<b>Architect</b>		<b>Dwg. No.</b>	<b>SD-ADC-H</b>
<b>Contractor</b>		<b>Date</b>	<b>03/04</b>

**KEES INCORPORATED**  
400 S. Industrial Dr. • P.O. Box L  
Elkhart Lake, WI 53020  
Phone: (920) 876-3391  
Fax: (920) 876-3065  
Website: www.kees.com